

OUTSCAPE

Unbreakable Performance, Built Tough




Outscape

Outscape is a durable inground lighting solution for trafficable areas, combining an engineered aluminum*Steel profile, silicone LED insert, and secondary silicone diffuser. Rated IK10 and IP68, it withstands up to 10 tonnes of traffic and is available in both linear and flexible profiles.

Lighting the Path Forward

Indoor Circulation, Landscapes, Town Squares, Pathways, Parks, Pedestrian Zones, and Transport Hubs, it's designed tough.

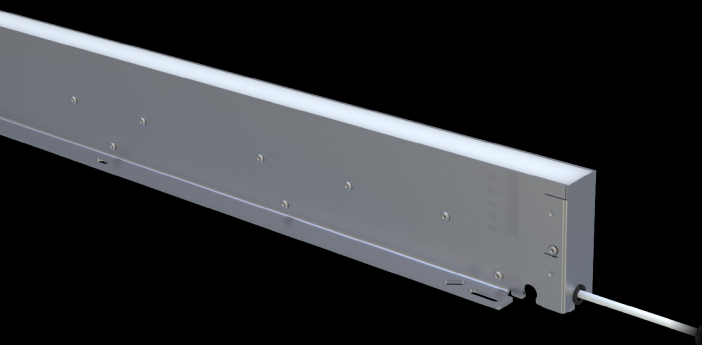

Adaptable Form, Seamless Illumination

With its rigid linear and free-bend flexible profile, the Outscape delivers uniform and continuous illumination, offering decorative, wayfinding, safety, and mood enhancing lighting options for both indoor and outdoor spaces.

Walk Tough, Drive Tougher

Outscape is made for the outdoors. With a combination of IK10 and specialized internal profile design, the Outscape Range, offers trafficable durability, supporting up to 10 tonnes*

*The Outscape Linea can withstand up to 10 tonnes 

*The Outscape Arc can withstand up to 2.5 tonnes 




Rain or Shine

With built-in UV stabilised, IK protection and IP-rated water resistance, Outscape maintains its premium quality and durability—even under the harshest sun and unpredictable weather.



Built for the Coast and Beyond

Engineered for extreme environments, The Outscape Linea profile offers additional durability with flame resistance, solvents and salwater resistance — making it ideal for coastal and high-risk areas.

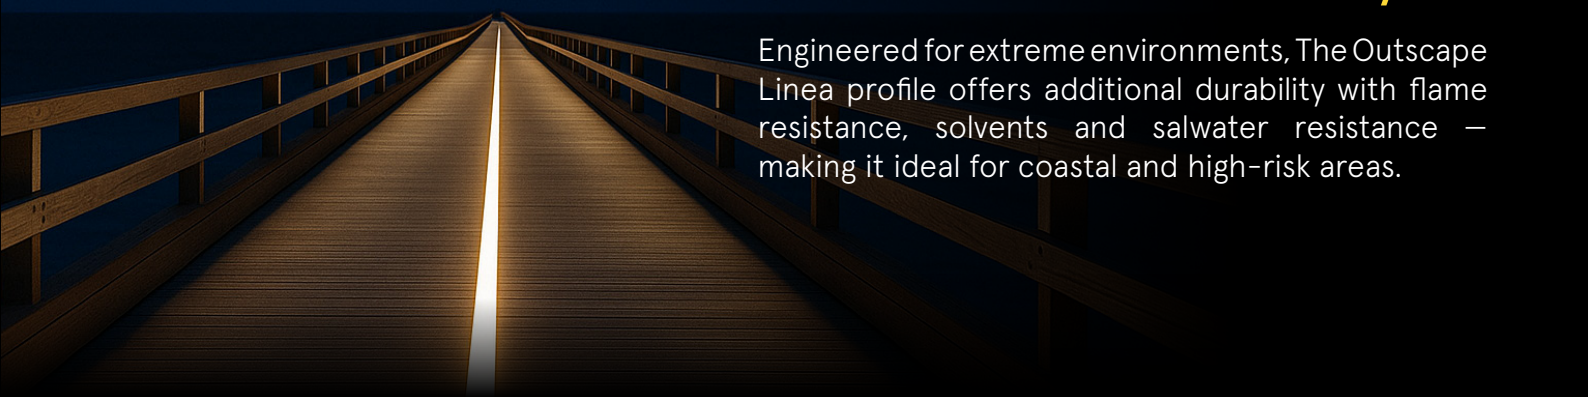


Tri Layer Design, True Inground Technology

The Outscape follows a unique Tri Layer format to deliver it's specialised robust attributes

Silicone Diffuser





Encapsulated LED



IP68 Connector





Embedded Profile

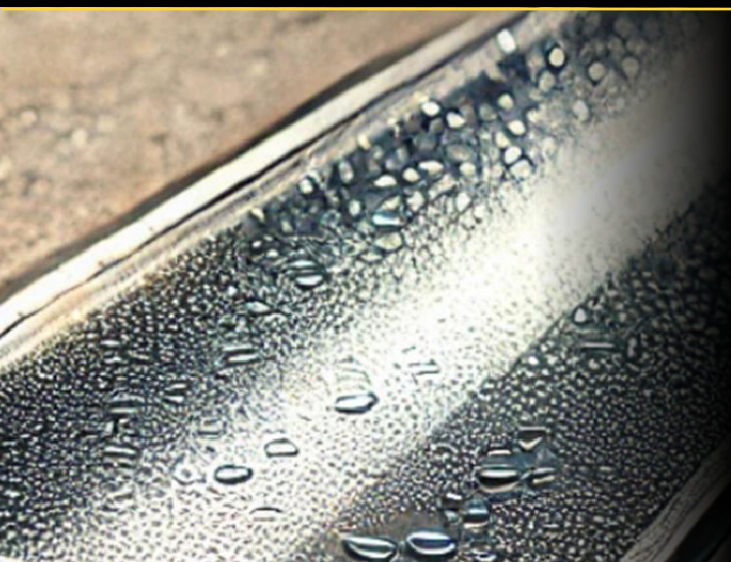

Moisture Free Engineering

Through extensive testing and engineering enhancements, 4th generation technology ensures a moisture free internal light chamber

Specification

	Outscape Arc	Outscape Linea
Line Drawing		
Mounting	Recessed	
Flux Range *Subject to configuration	440 Lm/m @ Green, 9 W 500 Lm/m @ White (4000K), 12 W	450 Lm/m @ White (4000K), 12 W 165 Lm/m @ Green, 15 W
Power Consumption Range *Subject to configuration	9 W/m 12 W/m	9 W/m 12 W/m 15 W/m
Luminous Efficacy *Subject to configuration	Up to 41.6 Lm/W	Up to 37.5 Lm/W
Correlated Colour Temperature	2100K / 3000K / 4000K / 5000K R/G/B	2100K / 3000K / 4000K / 5000K Tunable White RGB/W
IP/IK Rating	IP68 / IK10	IP68 / IK10
CRI Option	80+	80+
Innovation	UV Stabilised	UV Stabilised, Flame and Salt Water Resistant
Warranty	7 Years	5 Years
MacAdam	SDCM3	
Flexibility	Bends vertical and horizontal	Fixed Straight
Sustainability	EDP	EDP
Profile	Silicone, Aluminium Up to 10 meters diffuser	Silicone, Aluminium or Steel Up to 30 meters diffuser



INTEGRATE LIGHT WITH LIFE, BEAUTIFULLY

mlight
illumination engineering

Call +61 3 8786 3311 | mlightgroup.com
MADE IN AUSTRALIA

mLight has a policy of continuous improvements. All product specifications are correct at time of printing and are subject to change without notice. The visual representation of colours and finishes within this document may vary due to printing processes, paper stock and lighting of photography or renders. To view a physical sample of luminaires and accessories, contact your local mLight Product Consultant.