



SIGURI X


Perfect light against ingress and impact



SIGURI X

Delivering IP66 and IK11 ingress and impact protection, the Siguri X linear profile has been redesigned to offer a more robust and dynamic lighting solution.

With its visual design elements, precise engineering, and strong feature set, the Siguri X balances aesthetics and performance to create a complete solution.

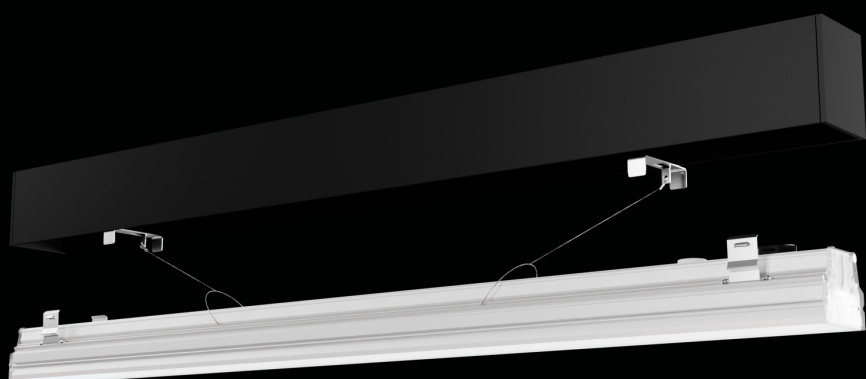


Inner Modules and Outer Profiles

The Siguri X is a two-part system: inner modules that deliver the light, coupled with an external profile, which when combined, deliver a continuous IP and IK solution to suit project design criteria!

Improved Ingress Protection

With its IP66 rating, the Siguri X is more resistant to ingress than ever before. Offering an improved design and fully sealed internal module it will withstand tougher challenges from the elements.

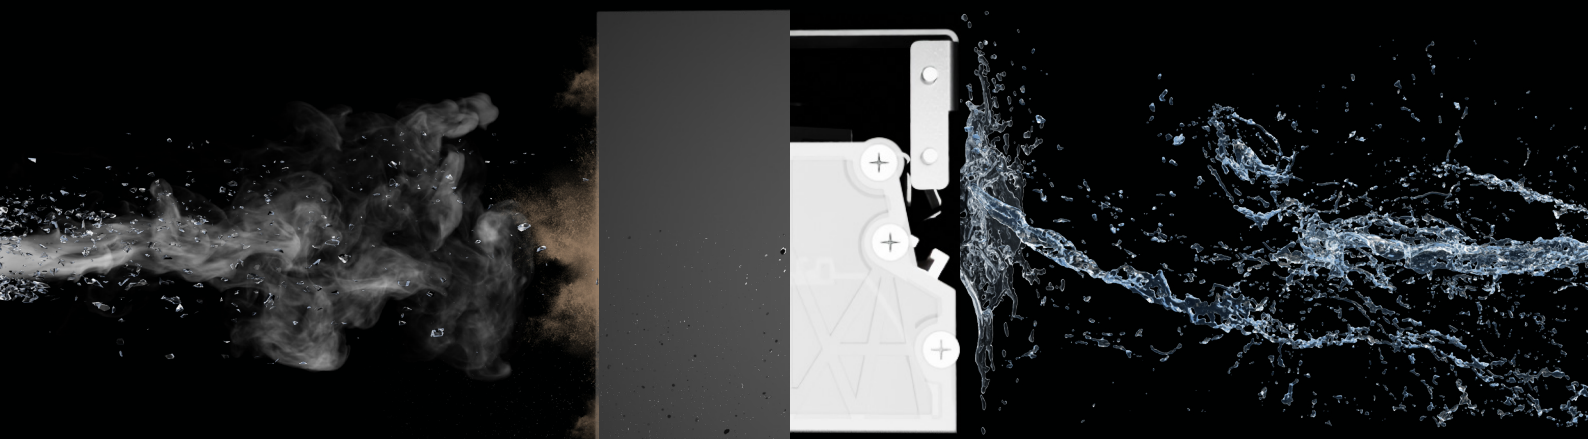

Tougher than Ever

The Siguri X combines IK11* impact resistance with IP66 protection, making it a perfect choice for challenging environments. Built to resist up to 10 kilograms of force, Siguri X is designed for the most demanding tasks.


**IK10 Officially Tested, IK11 Self-Tested*

Anti-Vandal Options


Not only Engineered to sustain the forces of nature but vandalism too. The Siguri X comes with our scratch-resistant pro-texture finish, combined with optional anti-vandal screws; it provides the perfect solution for public and outdoor spaces.

Modular and Continuous Lengths

Configure a singular modular length up to 3380mm or define a custom length where required* and combine internal modular selections to create longer continuous runs.

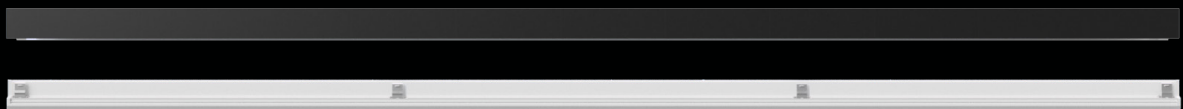

single module (3386mm maximum length)

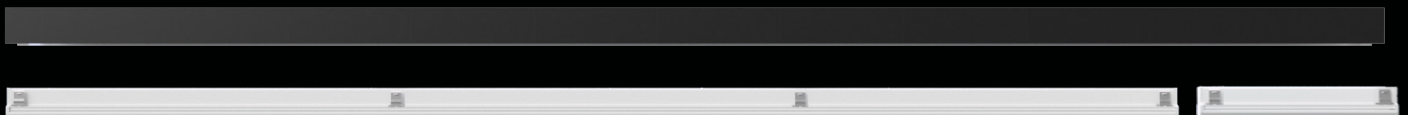

or a combination of modules to create a custom length

**Maximum module length 3386mm combined accordingly to achieve desired length.*



Uninterrupted Illumination

Introducing a new translucent polycarbonate end cap for the internal modules, designed to allow light to intentionally pass through to adjacent butting modules. This reduces dark spots*, ensuring continuous diffused illumination effect throughout the profile length.


**Anticipated reduction by 50%*




Siguri X is now available with selections of light distributions tailored to meet your project needs. Featuring Diffused, Smooth Glare Control, Asymmetric, and Batwing optical films.*

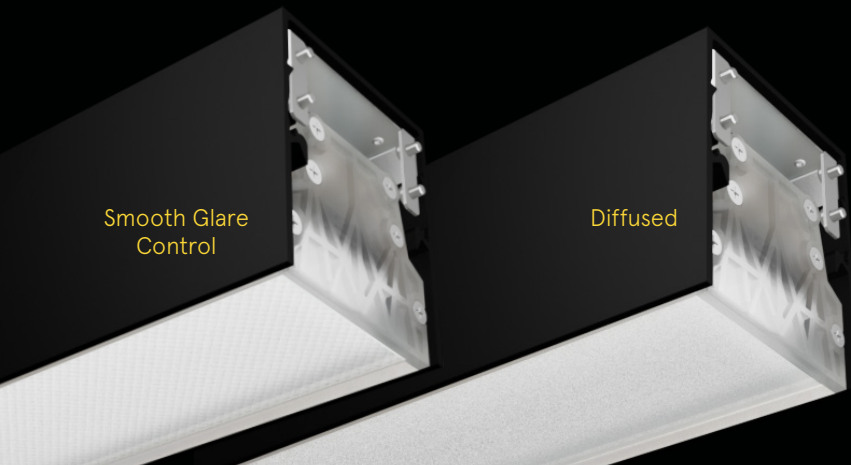


Diffused



Smooth Glare Control



Asymmetric




Batwing


**Available upon request*

Quick Installation

Firstly, securely mount the external profile, connect the safety wire, and easily insert the internal module until it locks in place. The Siguri X is ready to illuminate your environment.

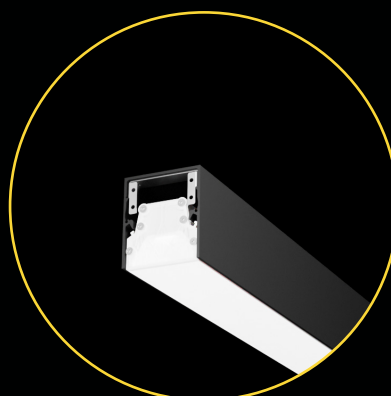

The robust retention fasteners allow for one-way insert, securely locking the internal module in place. A specialised key is required to remove it and will be supplied as part of the kit.

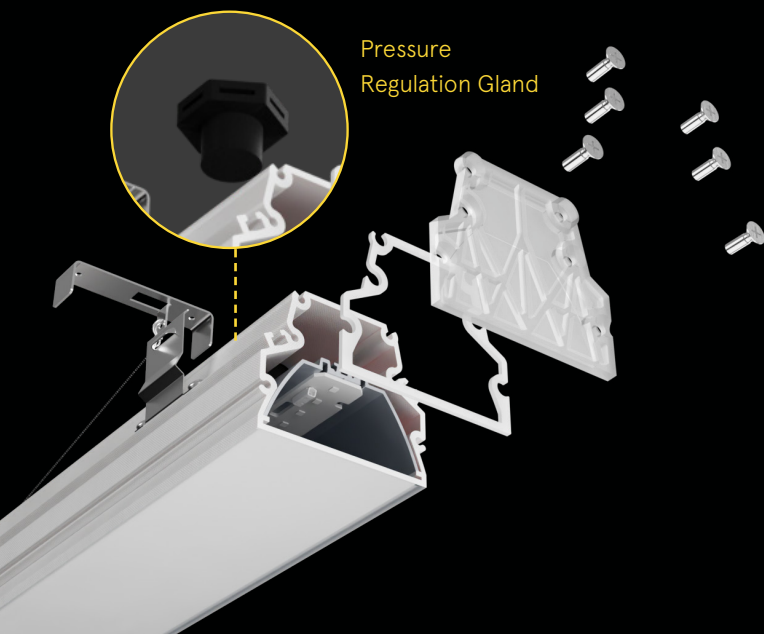

Perfectly Sealed

The inner module is a fully extruded lightweight polycarbonate body. This houses an aluminium heat sink and all the electrical components, which are sealed off at each end with precise silicone gaskets and end caps. A one way pressure control valve ensures the internal integrity of the module environment.

Whether installing or removing the Siguri X, the module will never need to be opened, and thus, the IP will remain intact.

Exceed Expectations

Using high-quality components and intelligent design, the Siguri X not only looks good but also delivers on every level. Now standard with CRI 90+ for improved colour rendering.

with < CRI 90



with CRI 90+

Worry-free with Siguri

Covered by mLight’s 10-year warranty and our tech support, the Siguri X ensures peace of mind.

	Siguri X	Siguri X Recessed
Line Drawing		
Mounting	Rod Suspended Surface Mounted Wall Mounted	Recessed
Weight	4.8kg/m	5kg/m
Flux Range *Subject to configuration	761 to 4899 Lm/m	
Power Consumption Range *Subject to configuration	6.8 to 52.8 W/m	
Luminous Efficacy *Subject to configuration	Up to 111 Lm/W @1200 lm/m, 10.8 W/m	
Environmental *Subject to configuration	IP66 IK11	

INTEGRATE LIGHT WITH LIFE, BEAUTIFULLY
