

ACCESSORIES

Zoom Spot

Product Description

Integrated modular adjustable single zoom spot downlight

Finish Options

Adaptor

Polycarbonate Black

Body

Powdercoat Black

Mounting Options

Track mounting (Magnetic 48V SELV track)

Adjustments

Tilt 110°

Rotation 370°

Zoom from 8° to 45°

Beam Angles for Spots

Optics

Adjustable beam angle

8° (narrow) to 45° (Wide)

Light Source

BridgeLux COB

3000K, 4000K

CRI 90+

Dimming Options

DALI

Lumen Maintenance

L80 > 72,000 hrs



Power Consumption

13W to 18W

Luminous Flux Range

530 to 680 Lm

@ 4000K, CRI 90+, Ta max 35°C

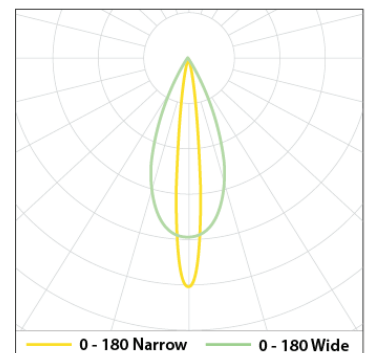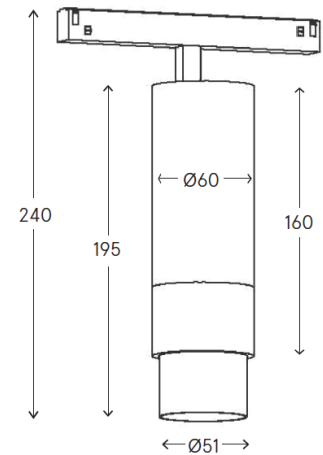

Direct Spots

IES Files available online
PhotoMetric Data NOTE: Values are approximate
Technical specifications are correct at time of publishing