

ALTEVO

Thoughtfully Designed, Engineered to Illuminate




ALTEVO

A bold step forward, Altevo embodies transformation and evolution. Combining a single light engine with variations in size, shape, beam angle, glare control and efficacy, the Altevo is a convenient, high quality all in one down light solution.

Single or Composed, Designed for Atmosphere

Altevo excels as both a standalone luminaire or as part of a composed group in complex ceiling layouts. Altevo offers the flexibility to achieve the perfect balance of functionality and aesthetics. Highlight a feature, wash a wall, or bring an office space to life with a lumen package ranging from 463 lm to 9034 lm.

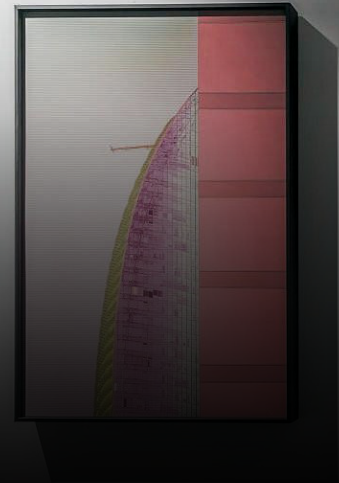

Minimal Design, Infinite Possibilities

Altevo's minimalist and adjustable design with rotation, fixed and tilt features, is available in round trim, round trimless, square trim, square trimless, and a variety of cutout sizes to bring your lighting vision to life.



Round Trim



Round Trimless



Square Trim



Square Trimless




Single Light Engine, Multiple Configuration Options

Altevo lets you personalise your module with a variety of sizes, shapes, and colours to meet your exact requirements. Delivering high-performance, consistent lighting, it also features an IP54 rating for reliable protection.

Optical Lenses

Accessories:
Honeycomb Louvre
Spread Lens
Diffusion Lens
Clear Lens

IP54 waterproof insert

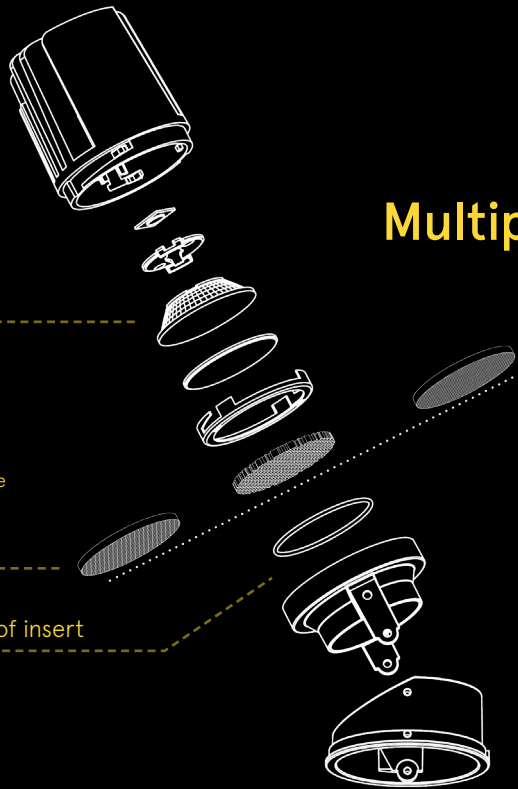


Interchangeable cover



Round Trimless



Round Trim



Square Trim



Square Trimless

Reflector Options



White





Silver



Black



Black Chrome



Black Chrome



Black




Silver



White

Completed Modules



Cutout Sizes



55



65



75



85




105



125



160




180



200

Set the Scene with Control and CCT

With DALI, TRIAC, 1-10V and Casambi, Bluetooth or Zigbee, the Altevo has no boundaries. From 2700k to 6000K and Tunable White, any scene is possible.

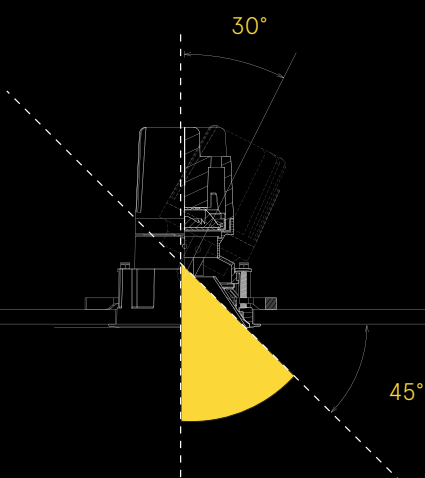

Eye-Friendly Illumination with up to a 45° Glare Cut-Off Angle

Altevo has been designed to balance both light output performance with glare control. Utilising a deep set LED module and delivering a 45 degree cut-off angle, the Altevo ensures low glare below UGR 19. Creating comfortable and inviting spaces.

Highlight It, Wash It, or Shape it, Beams Angles for All Occasions


8°

15°

24°

36°

60°

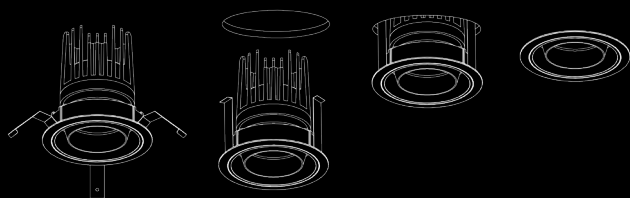

Simple to Setup, Easy to Install

The Altevo has been designed for functional ease. Not only is installation quick but future changes and maintenance can be carried out with a simple swap of reflectors or accessories.



ALTEVO 55

- Ø55mm Cutout Diameter
- 9W Power Consumption
- Rounded Trim Ring (Trimless and Trimmed)
- Tilt and Non-Tilted Angle
- 350° Rotation Angle and up to 25° Tilt Angle
- IP20 and IP54* *additional optic and glass required*
- UGR <19
- Beam Lens Variations 15° / 24° / 32° / 50°
- DALI /Triac/Bluetooth/Zigbee/Casambi/1-10V




ALTEVO 65

- Ø65mm Cutout Diameter
- 11W Power Consumption
- Rounded Trim Ring (Trimless and Trimmed)
- Tilt and Non-Tilted Angle
- 350° Rotation Angle and up to 25° Tilt Angle
- IP20 and IP54* *additional optic and glass required*
- UGR <19
- Beam Lens Variations 15° / 24° / 36° / 60°
- DALI /Triac/Bluetooth/Zigbee/Casambi/1-10V




ALTEVO 75

- Ø75mm Cutout Diameter
- 13W Power Consumption
- Rectangle and Rounded Trim Ring (Trimless and Trimmed)
- Tilt and Non-Tilted Angle
- 350° Rotation Angle and up to 25° Tilt Angle
- IP20 and IP54* *additional optic and glass required*
- UGR <19
- Beam Lens Variations 8° / 15° / 24° / 36° / 60°
- DALI /Triac/Bluetooth/Zigbee/Casambi/1-10V

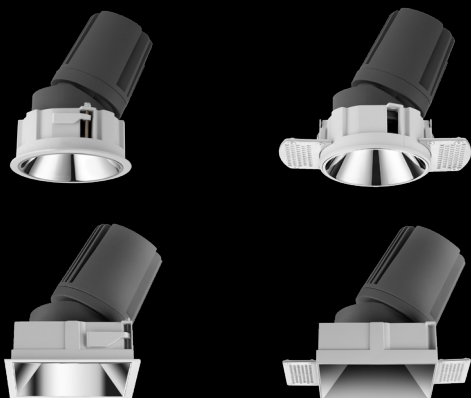


ALTEVO 85

- Ø85mm Cutout Diameter
- 14W Power Consumption
- Rectangle and Rounded Trim Ring (Trimless and Trimmed)
- Tilt and Non-Tilted Angle
- 350° Rotation Angle and up to 30° Tilt Angle
- IP20 and IP54* *additional optic and glass required*
- UGR <19
- Beam Lens Variations 8° / 15° / 24° / 36° / 60°
- DALI /Triac/Bluetooth/Zigbee/Casambi/1-10V

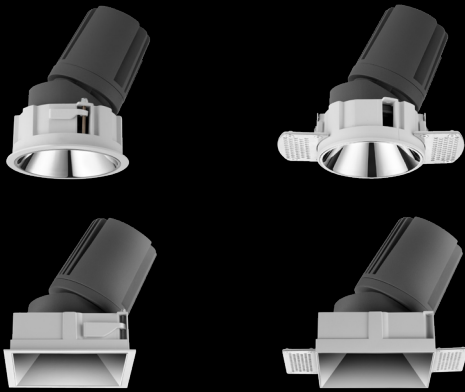

ALTEVO 105

- Ø105mm Cutout Diameter
- 25W Power Consumption
- Rectangle and Rounded Trim Ring (Trimless and Trimmed)
- Tilt and Non-Tilted Angle
- 350° Rotation Angle and up to 30° Tilt Angle
- IP20 and IP54* *additional optic and glass required*
- UGR <19
- Beam Lens Variations 15° / 24° / 40° / 55°
- DALI /Triac/Bluetooth/Zigbee/Casambi/1-10V

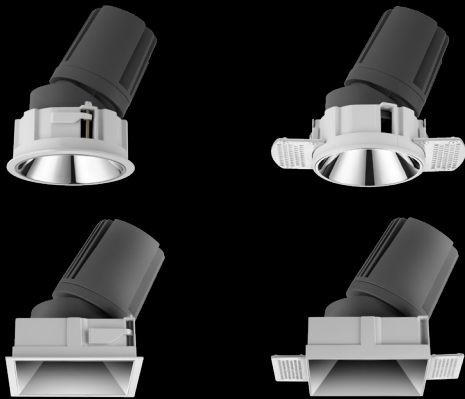

ALTEVO 125

- Ø125mm Cutout Diameter
- 41W Power Consumption
- Rectangle and Rounded Trim Ring (Trimless and Trimmed)
- Tilt and Non-Tilted Angle
- 350° Rotation Angle and up to 30° Tilt Angle
- IP20 and IP54* *additional optic and glass required*
- UGR <19
- Beam Lens Variations 15° / 24° / 36° / 45° / 50°
- DALI /Triac/Bluetooth/Zigbee/Casambi/1-10V



ALTEVO GRAND

- Ø160-230mm Cutout Diameter
- 60W/80W/120W Power Consumption
- Rounded Trim Ring
- Tilted
- 350° Rotation Angle and up to 25° Tilt Angle
- IP20 and IP54* *additional optic and glass required*
- UGR <19
- Beam Lens Variations 24° / 36° / 38° / 50° / 55°
- DALI /Triac/Bluetooth/Zigbee/Casambi/1-10V

MLIGHT QUALITY

Thoughtfully Designed, Engineered to Illuminate

Covered by Mlight
5 years warranty
54,000 hours
L80 B10



ALTEVO WALL WASHER

**Ideal spacing of 1000mm x 850mm*

With its near horizontal cut off and its unique vertical optical performance, the Altevo offers an ideal solution for highlighting surfaces or picking up unique features.



ALTEVO WW 55

- Ø55mm Cutout Diameter
- 9W Power Consumption
- Black/White Colour Finish
- IP20
- UGR <19
- Beam angle 80°
- DALI /Triac/Bluetooth/Zigbee/Casambi/1-10V



ALTEVO WW 75

- Ø75mm Cutout Diameter
- 12W Power Consumption
- Black/White Colour Finish
- IP20
- UGR <19
- Beam angle 80°
- DALI /Triac/Bluetooth/Zigbee/Casambi/1-10V

INTEGRATE LIGHT WITH LIFE, BEAUTIFULLY
