




EVELO X

Illumination with Precision and Lasting Comfort

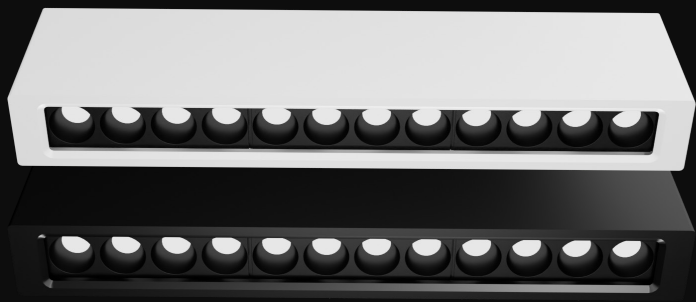


Evelo X

Evolved from the original Evelo series, Evelo X represents a significant advancement in architectural lighting. Featuring latest low glare performance optics, versatile photometric distributions and IP66 Ingress and IK11 impact resistance. The Evelo X delivers elegance, comfort, and environmental durability in a single package.

Performance without Compromise


Evelo X features an integrated system: pairing high-grade electronics, LEDs and optics with a sleek aluminium outer body. The result is a luminaire that delivers both on visual aesthetics, architectural lighting performance and doesn't compromise on resilience.

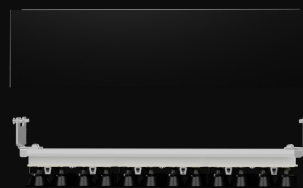

IP20



IP66 and IK11

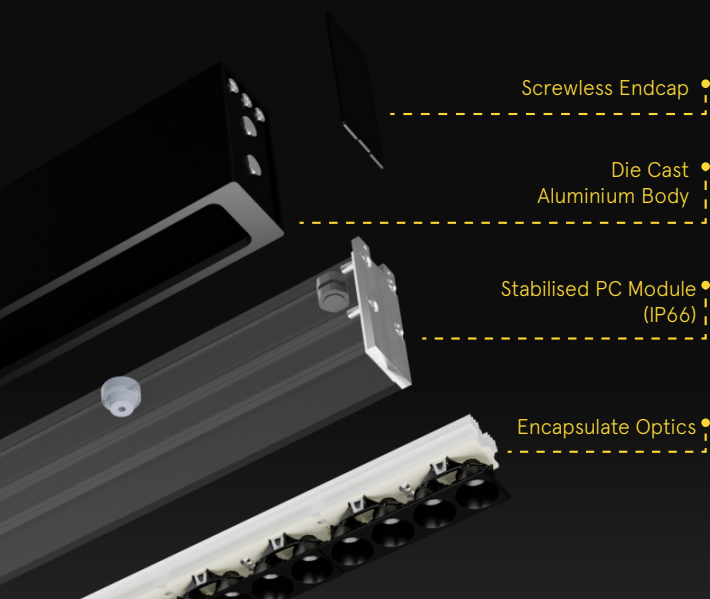

Visual Comfort, Ingress, and Impact Resilience

Offering IP66 with IK11, utilising a unique UV Stabilized Polycarbonate inner module innovatively encapsulating the critical Optics and LED Boards, ensuring a lighting solution that meets low glare, comfort performance with high impact and ingress protection.


**IP20 available*

Precision and Control

Utilising premium SCDM2 LED Boards, CRI90+, precision optics, DALI-2 drivers or Casambi control, the Evelo X offers the ability to not only shape your light and deliver efficiency, but it also delivers comfort and control. Ensuring shape, direction and distribution can all be met equally.

**Up to UGR10 utilising narrow beam angle*



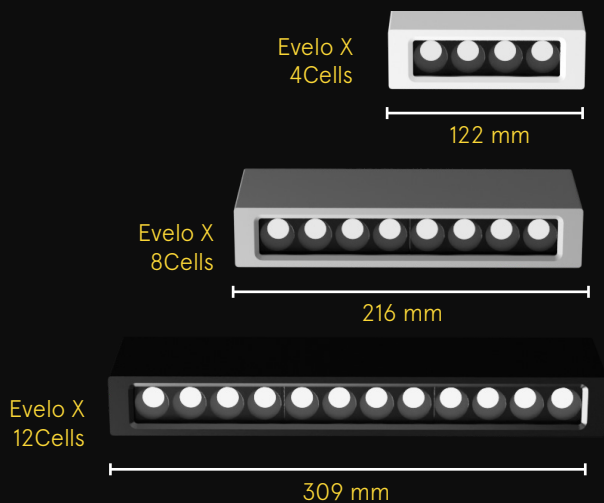



Modular Versatility

Available in three distinct modular sizes, 4 Cell, 8 Cell and 12 Cell, the Evelo X is scalable to any space, delivering luminous flux and power density with optical control.

**Recessed: length + 6 mm*

Narrow Focus to Broad Uniformity

From tightly focused narrow beams for accentuation and highlighting to broad volumetric distributions for uniform ambient illumination, the Evelo X provides the optical flexibility required to define architectural spaces and emphasize focal points with precision.

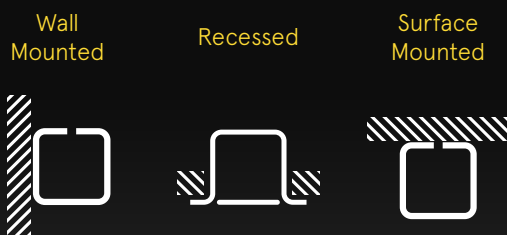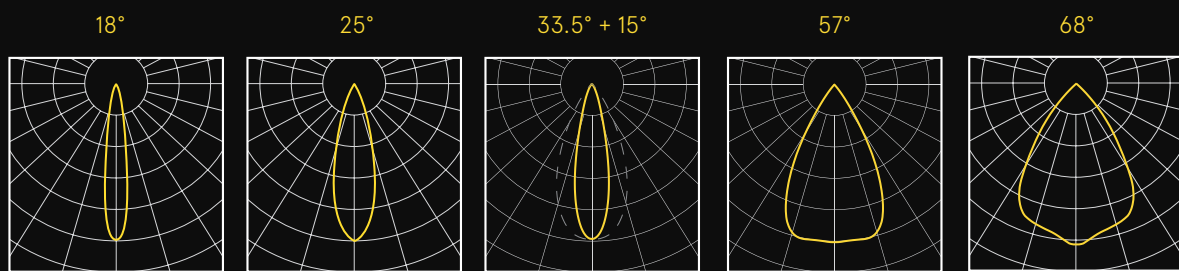

Surface, Wall or Recess

Mounting options to meet all key project requirements.

X-Signature Quality

The Evelo X follows the foundation of the X Range, combining exceptional durability, engineered thermal performance and quality components, the Evelo X includes a 10-year factory warranty. *L90 B10 @ 103,000hrs





Evelo X

Line Drawing			
Mounting	Surface Mounted Wall Mounted Recessed		
Flux Range *Subject to configuration	Evelo 4 Evelo 8 Evelo 12	360 – 700 Lm 720 – 1400 Lm 1080 – 2100 Lm	
Power Consumption Range *Subject to configuration	Evelo 4 Evelo 8 Evelo 12	3.4 – 8.6 W 6.8 – 17.1 W 10.2 – 25.7 W	
Luminous Efficacy *Subject to configuration	Up to 106.14 Lm/W @ Evelo 12, IP20, 10.17 W		
IP / IK Rating	IP20 IP66 and IK11		
UGR	IP20 IP65	<19, up to UGR10 @ 18° and 25° <19	
CRI	90+		
CCT	2700K / 3000K / 3500K / 4000K		
Control Options	Switch DIM DALI-2 Casambi Master Connect		
Colours	Body: Black / White / Silver Optics: Black / White <i>(Chrome available upon request)</i>		
Lifetime	L90 B10 103,000 hrs		

Warranty

10 Years

INTEGRATE LIGHT WITH LIFE, BEAUTIFULLY
