

ALTEVO

DOWNLIGHT

Thoughtfully Designed. Engineered to Illuminate.


ALTEVO Range

Table of Contents


0.	ALTEVO Module Configurator	3
1.	ALTEVO 55	4
2.	ALTEVO 65	12
3.	ALTEVO 75	20
4.	ALTEVO 85	32
5.	ALTEVO 105	41
6.	ALTEVO 125	50
7.	ALTEVO Grand	59

ALTEVO Range


Module Configurator

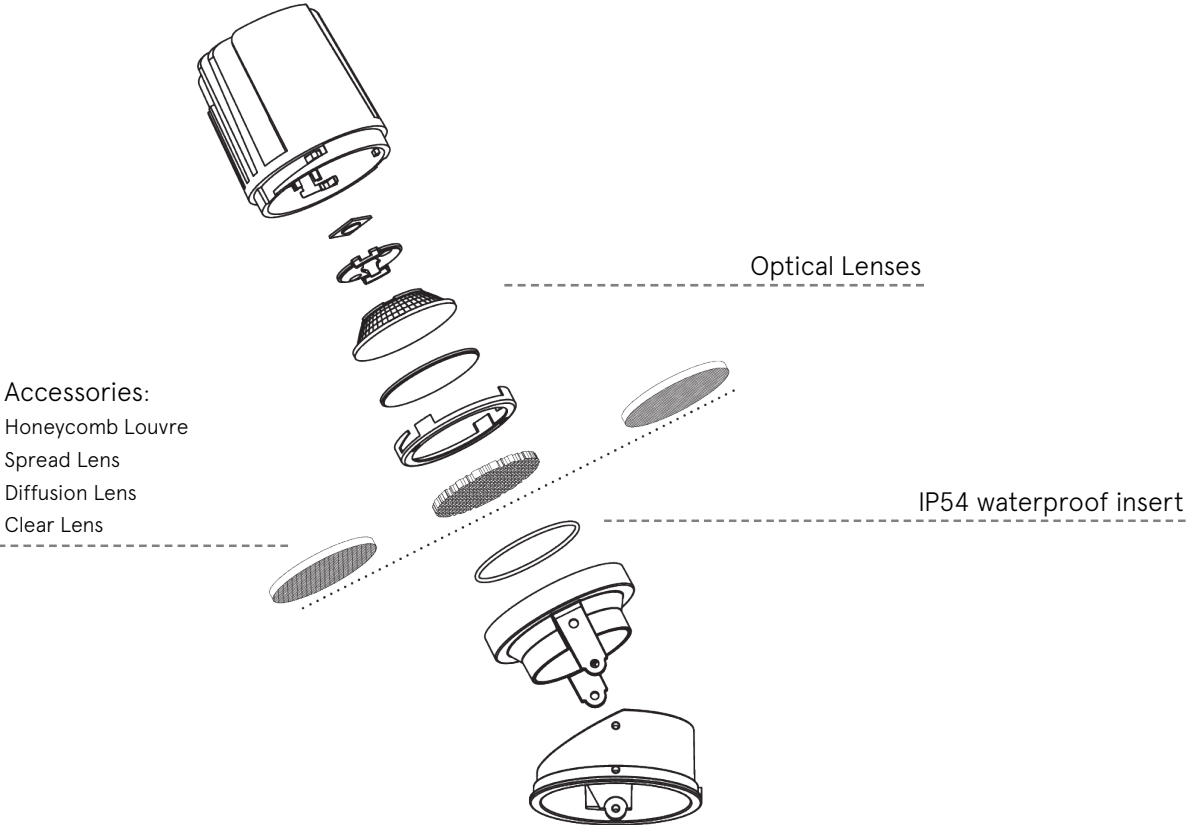


Interchangeable Cover

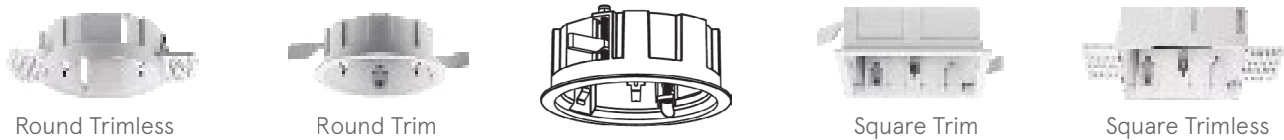

Reflector Options



Altevo Series Sizes

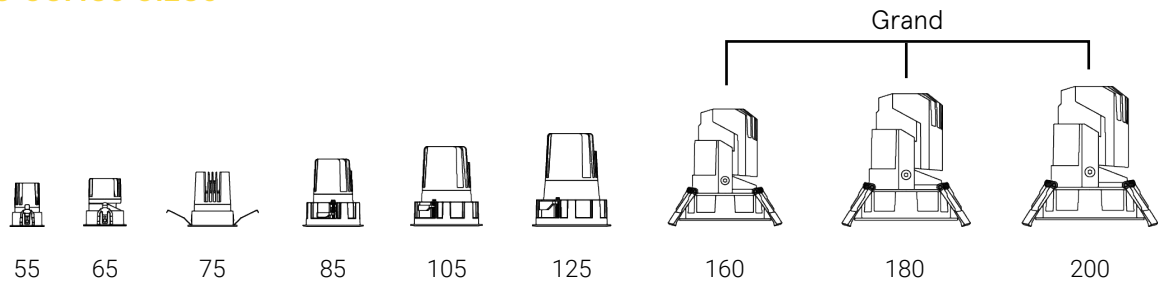

ALTEVO 55

LED Downlight - Catalogue



Ø60 x 83 H mm
Trim Tilted
Round, 9W



Ø90 x 83 H mm
Trimless Tilted
Round, 9W



Ø62 x 83 H mm
Trim Narrow Tilted
Round, 9W



Ø62 x 83 H mm
Trim Side Narrow Tilted
Round, 9W



Ø62 x 76 H mm
Trim Non-tilted
Round, 9W



Ø90 x 76 H mm
Trimless Non-tilted
Round, 9W



Ø62 x 76 H mm
Trim Narrow Non-tilted
Round, 9W

ALTEVO 55

Physical

Style & Shape
Trim Tilt, Round

Dimensions
Ø60 x 83 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
304 to 665 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
9W

Luminous Efficacy
Up to 71.1 lm/W @ 665 lm, 9.3W

Luminous Maintenance
54,000hrs (L80 B10)




Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

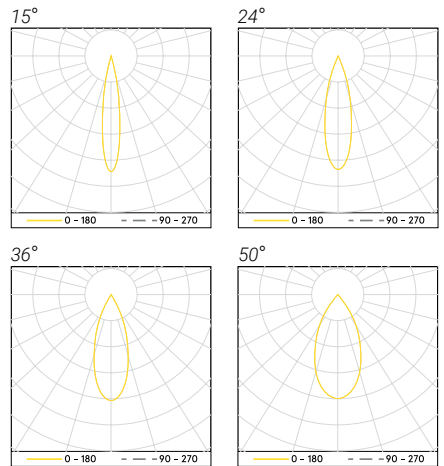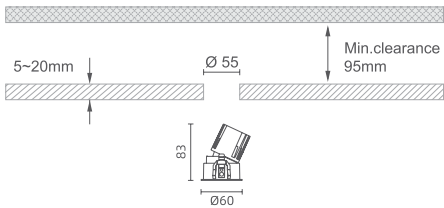

Reflector Colour Options



Optical Accessories



System Power	System Output	Beam	CCT	CRI
9W	621lm	15°	4000K	>90
	641lm	24°		
	665lm	36°		
	619lm	50°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO55-TRIM TILT-ROUND-WHITE-IP20-11W-DALI-2-570LM-24D-HONEYCOMB-CHROME-935

ALTEVO 55

Physical

Style & Shape

Trimless Tilt, Round

Dimensions

Ø90 x 83 H mm

Adjustment

Rotation 350°
Tilt 25°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20
IP54 *additional optic and glass required*

Warranty

5 Years

Photometrics

Flux Range

462 to 570 lm

**Based on all tested combinations*

Distributions

Beam Lens Variations

15° / 24° / 36° / 50°

Optical Accessories *optional*

Honeycomb
Spread Lens
Diffuser
Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

9W

Luminous Efficacy

Up to 63.3 Lm/W @ 570 lm, 9W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source

LED COB

Colour Rendering Index




90+

Correlated Colour Temperature

White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM


3

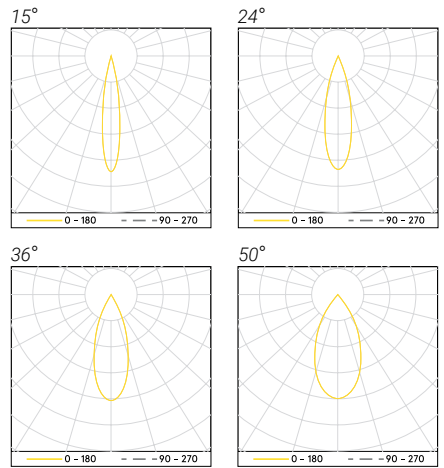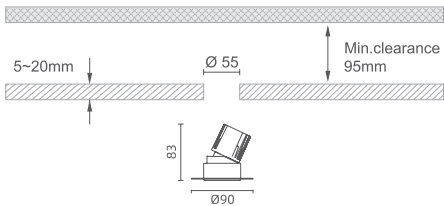

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVO55-TRIMLESS TILT-ROUND-WHITE-IP20-11W-DALI-2-570LM-24D-HONEYCOMB-CHROME-935

ALTEVO 55

Physical

Style & Shape
Trim Narrow Tilt, Round

Dimensions
Ø62 x 83 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
240 to 479 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 32° / 40°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
Black

Electrical

Control Gear
Remote

Power Consumption
9W

Luminous Efficacy
Up to 51.3 Lm/W @ 479 lm, 9.3W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

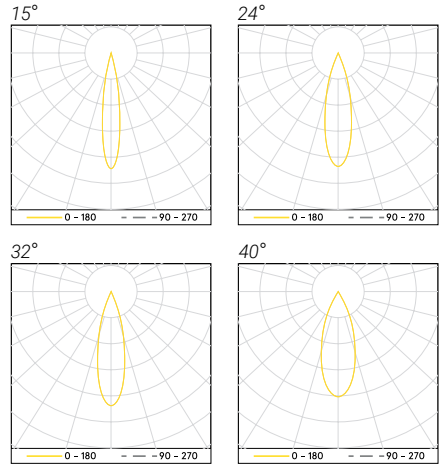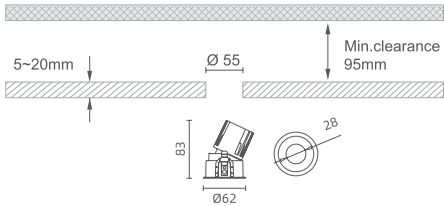

Reflector Colour Options



Black

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO55-TRIM NARROW TILT-ROUND-WHITE-IP20-11W-DALI-2-486LM-24D-HONEYCOMB-BLACK-935

ALTEVO 55

Physical

Style & Shape
Trim Side Narrow, Tilt, Round

Dimensions
Ø62 x 83 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
247 to 484 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 32° / 40°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
Black

Electrical

Control Gear
Remote

Power Consumption
9W

Luminous Efficacy
Up to 51.9 lm/W @ 484 lm, 9.3W

Luminous Maintenance
54,000hrs (L80 B10)




Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

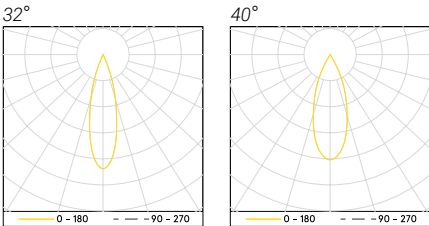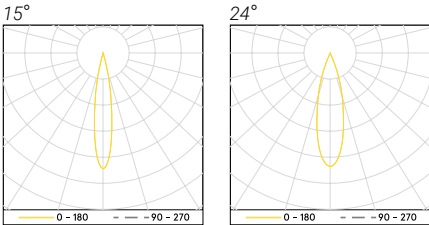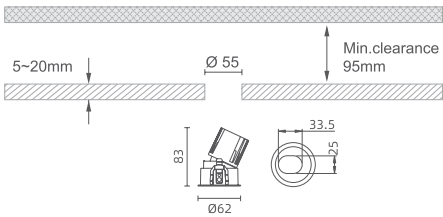

Reflector Colour Options



Black

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO55-TRIM SIDE NARROW TILT-SQUARE-WHITE-IP20-11W-DALI-2-425LM-24D-HONEYCOMB-BLACK-935

ALTEVO 55

Physical

Style & Shape
Trim Non-tilt, Round

Dimensions
Ø62 x 76 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
313 to 726 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
9W

Luminous Efficacy
Up to 77 Lm/W @ 726 lm, 9.4W

Luminous Maintenance
54,000hrs (L80 B10)




Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

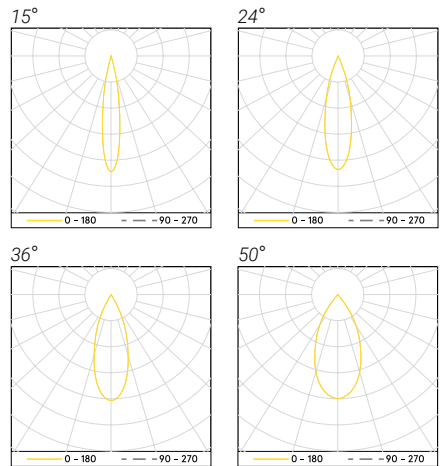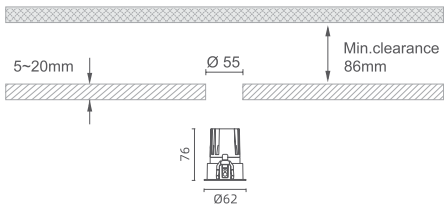

Reflector Colour Options



Optical Accessories



System Power	System Output	Beam	CCT	CRI
9W	661lm	15°	4000K	>90
	671lm	24°		
	726lm	36°		
	680lm	50°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO55-TRIM NONTILT-ROUND-WHITE-IP20-11W-DALI-2-570LM-24D-HONEYCOMB-CHROME-935

ALTEVO 55

Physical

Style & Shape
Trimless Non-Tilt, Round

Dimensions
Ø90 x 76 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
313 to 726 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
9W

Luminous Efficacy
Up to 77 Lm/W @ 726 lm, 9.4W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K


SDCM
3

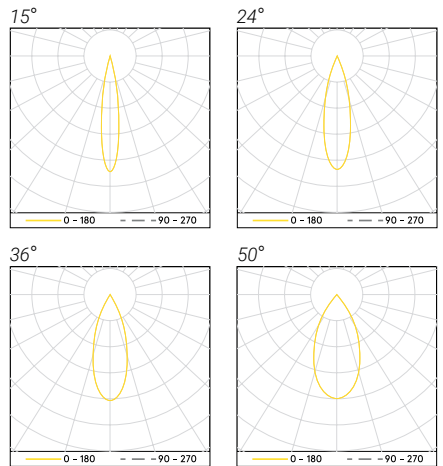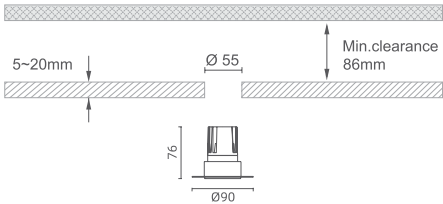

Reflector Colour Options



Optical Accessories



System Power	System Output	Beam	CCT	CRI
9W	661lm	15°	4000K	>90
	671lm	24°		
	726lm	36°		
	680lm	50°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO55-TRIMLESS NONTILT-ROUND-WHITE-IP20-11W-DALI-2-570LM-24D-HONEYCOMB-CHROME-935

ALTEVO 55

Physical

Style & Shape
Trim Narrow Non-tilt, Round

Dimensions
Ø62 x 76 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
270 to 579 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 32° / 40°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
Black

Electrical

Control Gear
Remote

Power Consumption
9W

Luminous Efficacy
Up to 60.8 lm/W @ 579 lm, 9.5W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

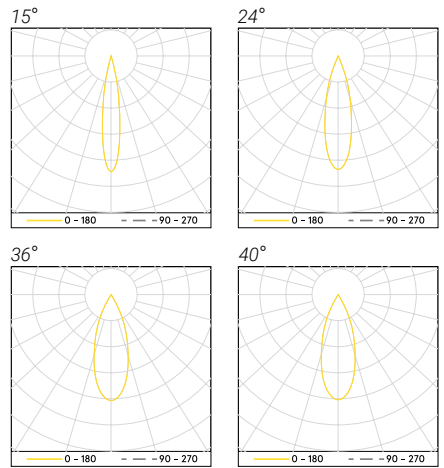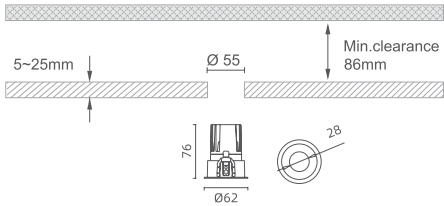

Reflector Colour Options



Black

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

System Power	System Output	Beam	CCT	CRI
9W	499lm	15°	4000K	>90
	505lm	24°		
	579lm	36°		
	490lm	40°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO55-TRIM NARROW NONTILT-ROUND-WHITE-IP20-11W-DALI-2-486LM-24D-HONEYCOMB-BLACK-935

ALTEVO 65

LED Downlight - Catalogue



Ø72 x 92 H mm
Trim Tilted
Round, 11W



Ø100 x 92 H mm
Trimless Tilted
Round, 11W



Ø72 x 92 H mm
Trim Narrow Tilted
Round, 11W



Ø72 x 92 H mm
Trim Side Narrow Tilted
Round, 11W



Ø72 x 75 H mm
Trim Non-tilted
Round, 11W



Ø100 x 75 H mm
Trimless Non-tilted
Round, 11W



Ø72 x 75 H mm
Trim Narrow Non-tilted
Round, 11W

ALTEVO 65

Physical

Style & Shape
Trim Tilt, Round

Dimensions
Ø72 x 92 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
382 to 806 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
11W

Luminous Efficacy
Up to 73 Lm/W @ 806 lm, 11W

Luminous Maintenance
54,000hrs (L80 B10)




Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K


SDCM
3

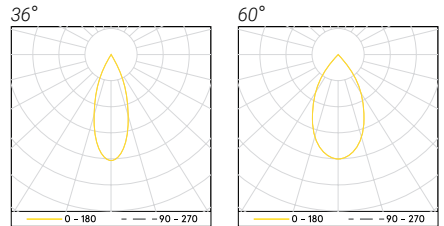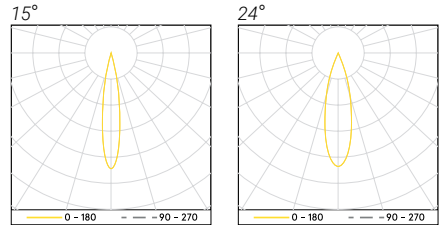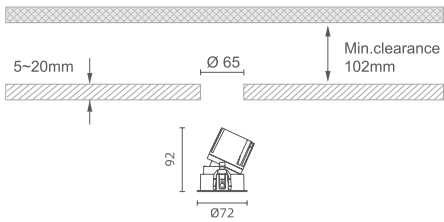

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO65-TRIM TILT-ROUND-WHITE-IP20-11W-DALI-2-781LM-24D-HONEYCOMB-CHROME-935

ALTEVO 65

Physical

Style & Shape
Trimless Tilt, Round

Dimensions
Ø100 x 92 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
382 to 806 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
11W

Luminous Efficacy
Up to 73 Lm/W @ 806 lm, 11W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

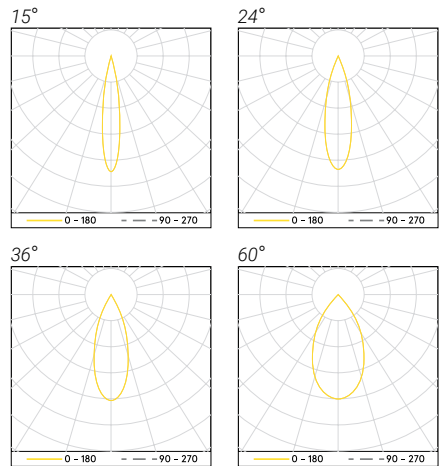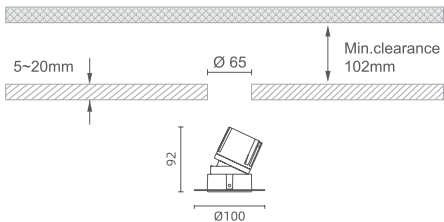

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO65-TRIMLESS TILT-ROUND-WHITE-IP20-11W-DALI-2-781LM-24D-HONEYCOMB-CHROME-935

ALTEVO 65

Physical

Style & Shape
Trim Narrow Tilt, Round

Dimensions
Ø72 x 92 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
252 to 629 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
Black

Electrical

Control Gear
Remote

Power Consumption
11W

Luminous Efficacy
Up to 57.2 Lm/W @ 629 lm, 11W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

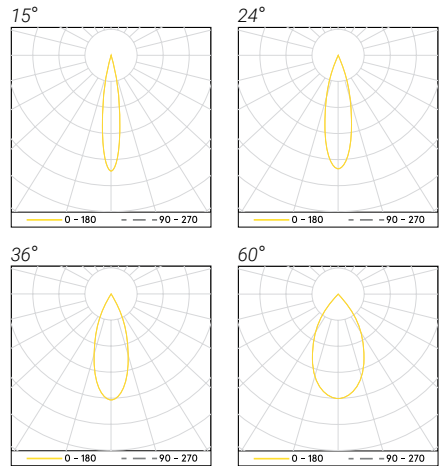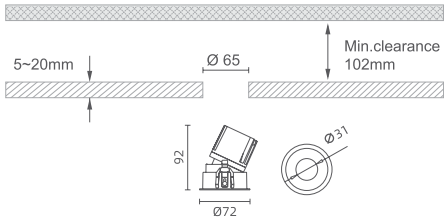

Reflector Colour Options



Black

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO65-TRIM NARROW TILT-ROUND-WHITE-IP20-11W-DALI-2-585LM-24D-HONEYCOMB-BLACK-935

ALTEVO 65

Physical

Style & Shape
Trim Side Narrow Tilt, Round

Dimensions
Ø72 x 92 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
545 to 624 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
Black

Electrical

Control Gear
Remote

Power Consumption
11W

Luminous Efficacy
Up to 56.72 Lm/W @ 624 lm, 11W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

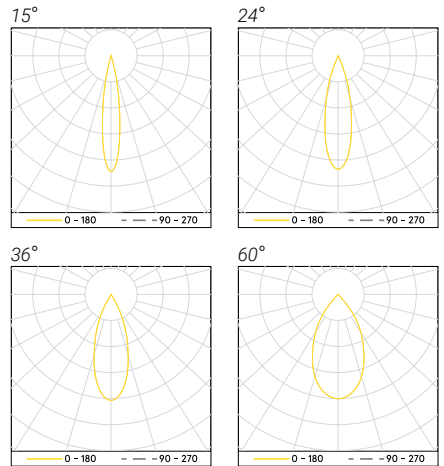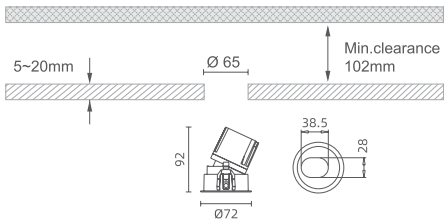

Reflector Colour Options



Black

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO65-TRIM SIDE NARROW TILT-ROUND-WHITE-IP20-11W-DALI-2-624LM-24D-HONEYCOMB-BLACK-935

ALTEVO 65

Physical

Style & Shape
Trim Non-tilt, Round

Dimensions
Ø72 x 75 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
403 to 910 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
11W

Luminous Efficacy
Up to 81.4 Lm/W @ 910 lm, 11.2W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

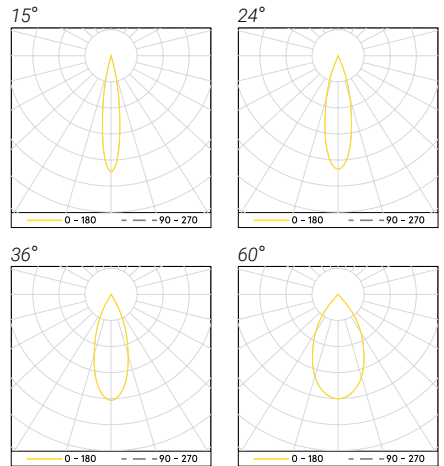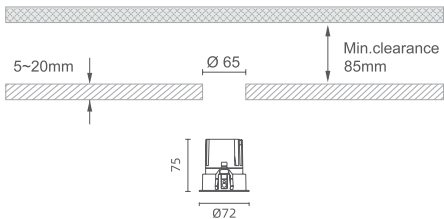

Reflector Colour Options



Optical Accessories



System Power	System Output	Beam	CCT	CRI
9W	767lm	15°	4000K	>90
	892lm	24°		
	910lm	36°		
	896lm	60°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO65-TRIM NONTILT-ROUND-WHITE-IP20-11W-DALI-2-781LM-24D-HONEYCOMB-CHROME-935

ALTEVO 65

Physical

Style & Shape
Trimless Non-tilt, Round

Dimensions
Ø100 x 75 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
403 to 910 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
11W

Luminous Efficacy
Up to 81.4 lm/W @ 910 lm, 11.2W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

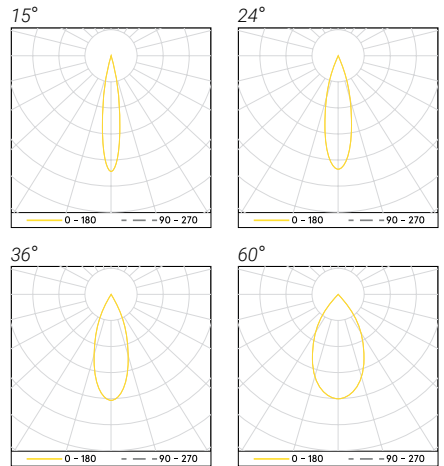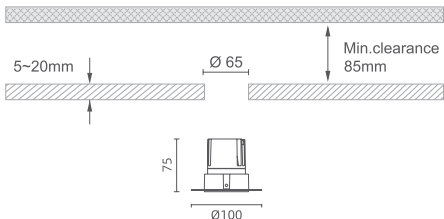

Reflector Colour Options



Optical Accessories



System Power	System Output	Beam	CCT	CRI
9W	767lm	15°	4000K	>90
	892lm	24°		
	910lm	36°		
	896lm	60°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO65-TRIMLESS NONTILT-ROUND-WHITE-IP20-11W-DALI-2-781LM-24D-HONEYCOMB-CHROME-935

ALTEVO 65

Physical

Style & Shape
Trim Narrow Non-tilt, Round

Dimensions
Ø72 x 75 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
355 to 755 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
Black

Electrical

Control Gear
Remote

Power Consumption
11W

Luminous Efficacy
Up to 68.7 Lm/W @ 755 lm, 11W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

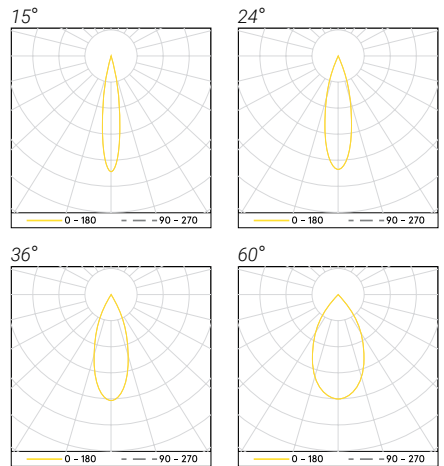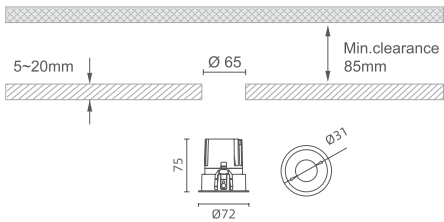

Reflector Colour Options



Black

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

System Power	System Output	Beam	CCT	CRI
9W	589lm	15°	4000K	>90
	635lm	24°		
	755lm	36°		
	653lm	60°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO65-TRIM NARROW NONTILT-ROUND-WHITE-IP20-11W-DALI-2-585LM-24D-HONEYCOMB-BLACK-935

ALTEVO 75

LED Downlight - Catalogue



Ø82 x 112 H mm
Trim Tilted
Round, 13W



Ø110 x 112 H mm
Trimless Tilted
Round, 13W



Ø82 x 112 H mm
Trim Narrow Tilted
Round, 13W



85 W x 85 L x 113 H mm
Trim Tilted
Square, 13W



74 W x 135 L x 113 H mm
Trimless Tilted
Square, 13W



Ø82 x 112 H mm
Trim Side Narrow Tilted
Round, 13W



Ø82 x 89 H mm
Trim Non-tilted
Round, 13W



Ø110 x 89 H mm
Trimless Non-tilted
Round, 13W



Ø82 x 89 H mm
Trim Narrow Non-tilted
Round, 13W



85 W x 85 H x 92 L mm
Trim Non-tilted
Square, 13W



74 W x 135 L x 92 H mm
Trimless Non-tilted
Square, 13W

ALTEVO 75

Physical

Style & Shape
Trim Tilt, Round

Dimensions
Ø82 x 112 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
538 to 988 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

System Power	System Output	Beam	CCT	CRI
13W	538lm	8°	4000K	>90
	844lm	15°		
	890lm	24°		
	988lm	36°		
	893lm	60°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO75-TRIM TILT-ROUND-WHITE-IP20-11W-DALI-2-883LM-24D-HONEYCOMB-CHROME-935

Electrical

Control Gear
Remote

Power Consumption
13W

Luminous Efficacy
Up to 74.3 lm/W @ 988 lm, 13.3W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

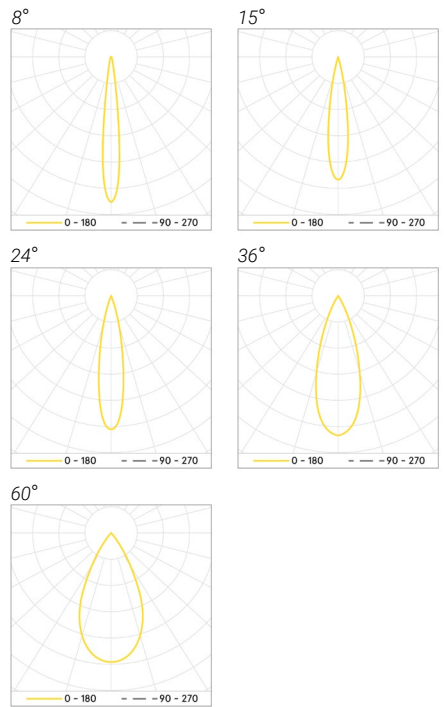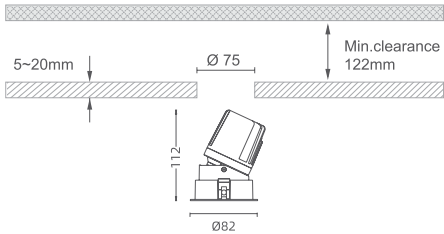

Reflector Colour Options



Optical Accessories



ALTEVO 75

Physical

Style & Shape

Trimless Tilt, Round

Dimensions

Ø110 x 112 H mm

Adjustment

Rotation 350°
Tilt 25°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20
IP54 *additional optic and glass required*

Warranty

5 Years

Photometrics

Flux Range

538 to 988 lm

**Based on all tested combinations*

Distributions

Beam Lens Variations

8° / 15° / 24° / 36° / 60°

Optical Accessories *optional*

Honeycomb
Spread Lens
Diffuser
Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

13W

Luminous Efficacy

Up to 74.3 Lm/W @ 988 lm, 13.3W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source

LED COB

Colour Rendering Index



90+

Correlated Colour Temperature

White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM


3

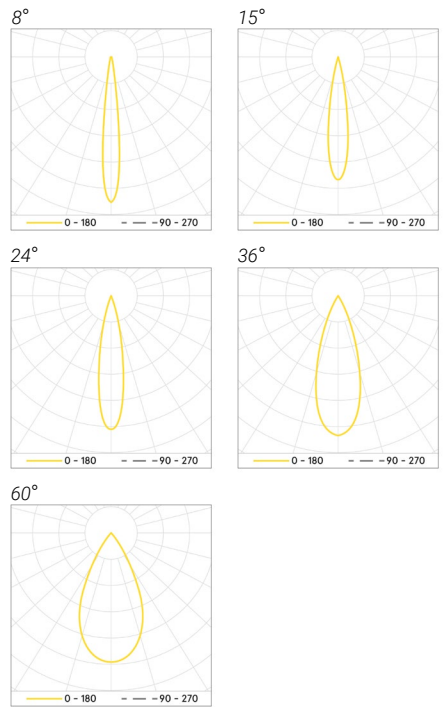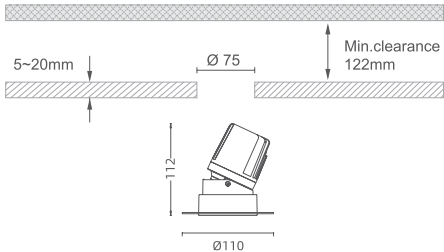

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVO75-TRIMLESS TILT-ROUND-WHITE-IP20-11W-DALI-2-883LM-24D-HONEYCOMB-CHROME-935

ALTEVO 75

Physical

Style & Shape
Trim Narrow Tilt, Round

Dimensions
Ø82 x 112 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
426 to 761 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
Black

Electrical

Control Gear
Remote

Power Consumption
13W

Luminous Efficacy
Up to 58.5 lm/W @ 761 lm, 13W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

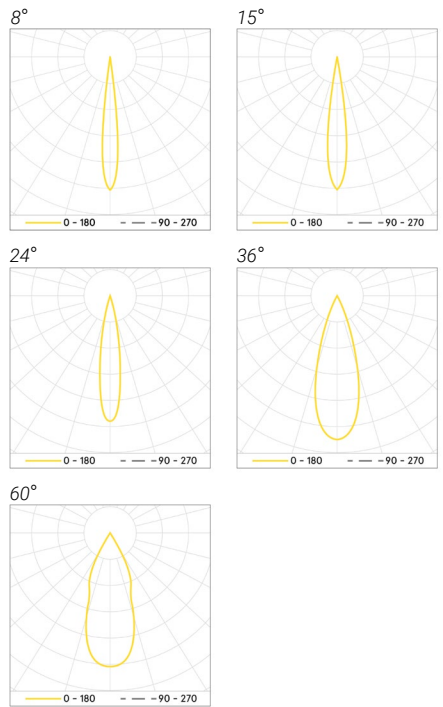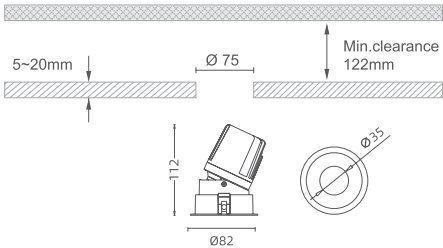

Reflector Colour Options



Black

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO75-TRIM NARROW TILT-ROUND-WHITE-IP20-11W-DALI-2-662LM-24D-HONEYCOMB-CHROME-935

ALTEVO 75

Physical

Style & Shape
Trim Tilt, Square

Dimensions
85 W x 85 L x 113 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
590 to 976 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

System Power	System Output	Beam	CCT	CRI
13W	590lm	8°	4000K	>90
	871lm	15°		
	920lm	24°		
	976lm	36°		
	873lm	60°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO75-TRIM TILT-SQUARE-WHITE-IP20-11W-DALI-2-883LM-24D-HONEYCOMB-CHROME-935

Electrical

Control Gear
Remote

Power Consumption
13W

Luminous Efficacy
Up to 75 Lm/W @ 976 lm, 13W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

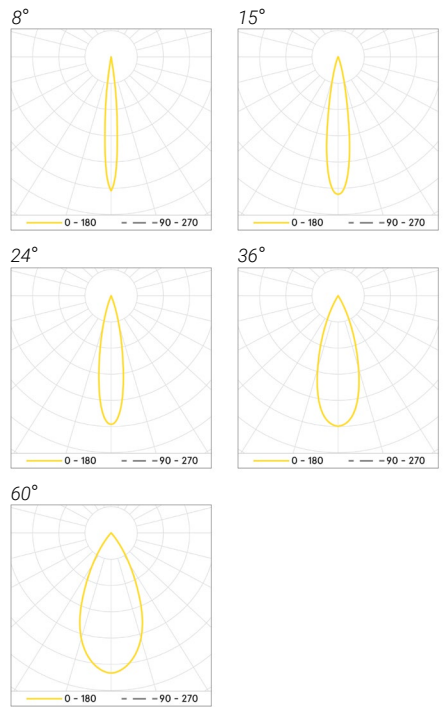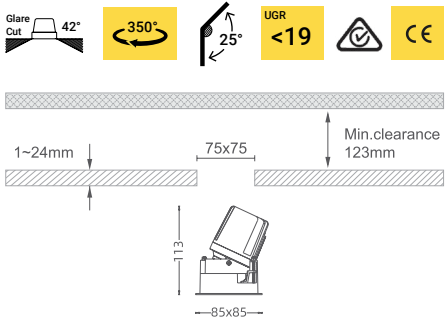

Reflector Colour Options



Optical Accessories



ALTEVO 75

Physical

Style & Shape
Trimless Tilt, Square

Dimensions
74 W x 135 L x 113 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
590 to 976 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

System Power	System Output	Beam	CCT	CRI
13W	590lm	8°	4000K	>90
	871lm	15°		
	920lm	24°		
	976lm	36°		
	873lm	60°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO75-TRIMLESS TILT-SQUARE-WHITE-IP20-11W-DALI-2-883LM-24D-HONEYCOMB-CHROME-935

Electrical

Control Gear
Remote

Power Consumption
13W

Luminous Efficacy
Up to 75 Lm/W @ 976 lm, 13W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

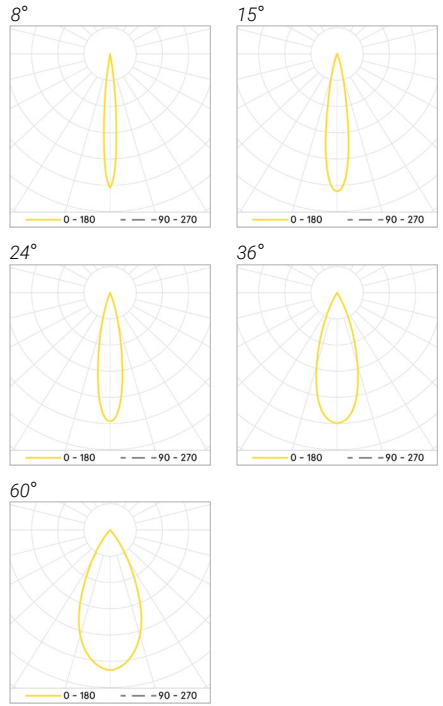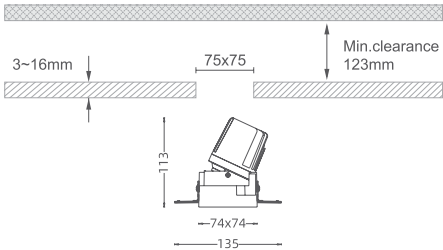

Reflector Colour Options



Optical Accessories



ALTEVO 75

Physical

Style & Shape
Trim Side Narrow Tilt, Round

Dimensions
Ø82 x 112 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
419 to 750 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
Black

Electrical

Control Gear
Remote

Power Consumption
13W

Luminous Efficacy
Up to 57.6 lm/W @ 750 lm, 13W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

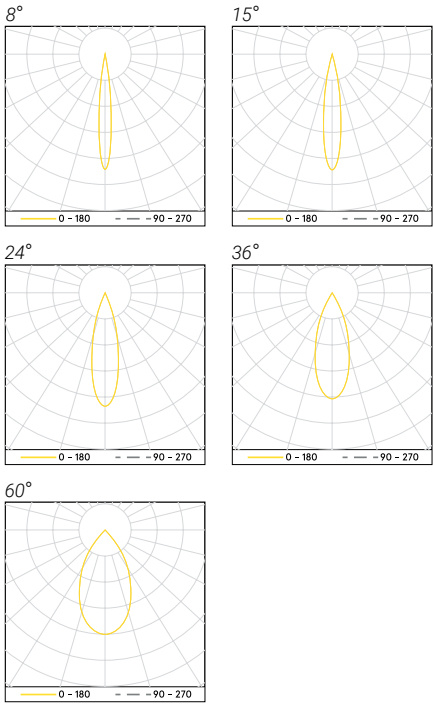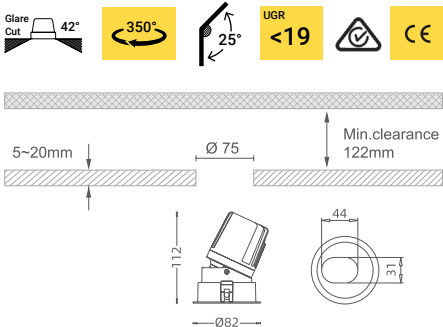

Reflector Colour Options



Black

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO75-TRIM SIDE NARROW TILT-ROUND-WHITE-IP20-11W-DALI-2-706LM-24D-HONEYCOMB-CHROME-935

ALTEVO 75

Physical

Style & Shape

Trim Non-tilt, Round

Dimensions

Ø82 x 89 H mm

Adjustment

Rotation 350°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20

IP54 additional optic and glass required

Warranty

5 Years

Photometrics

Flux Range

499 to 1003 lm

*Based on all tested combinations

Distributions

Beam Lens Variations

8° / 15° / 24° / 36° / 60°

Optical Accessories optional

Honeycomb

Spread Lens

Diffuser

Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

13W

Luminous Efficacy

Up to 74.4 Lm/W @ 1003 lm, 13.5W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output

DALI-2

1 - 10V

TRIAC

Bluetooth available upon request

Zigbee available upon request

Casambi available upon request

Light Source

LED COB

Colour Rendering Index

90+

Correlated Colour Temperature

White





2700K / 3000K / 3500K / 4000K / 5000K

Tunable White

2700 - 6000K

SDCM


3

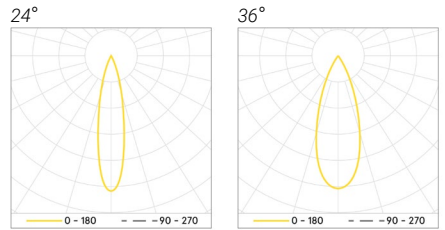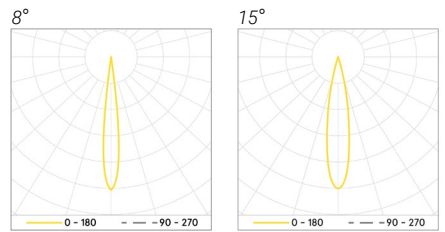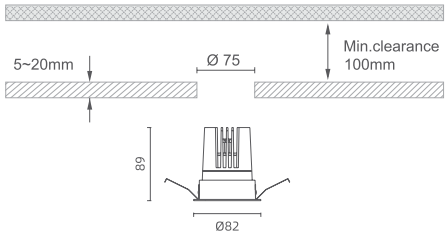

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVO75-TRIM NONTILT-ROUND-WHITE-IP20-11W-DALI-2-883LM-24D-HONEYCOMB-CHROME-935

ALTEVO 75

Physical

Style & Shape
Trimless Non-tilt, Round

Dimensions
Ø110 x 89 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
499 to 1003 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
13W

Luminous Efficacy
Up to 74.4 Lm/W @ 1003 lm, 13.5W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

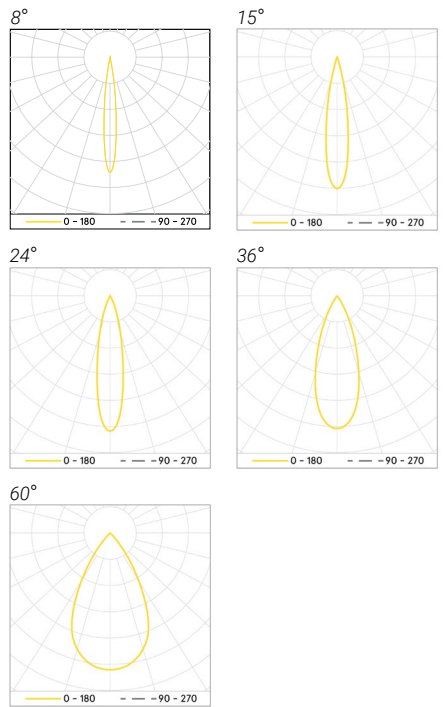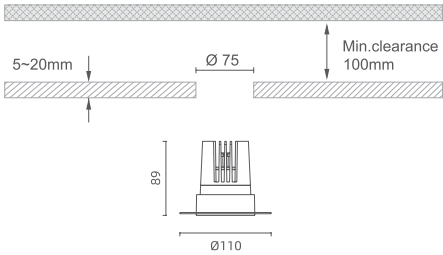

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO75-TRIMLESS NONTILT-ROUND-WHITE-IP20-11W-DALI-2-883LM-24D-HONEYCOMB-CHROME-935

ALTEVO 75

Physical

Style & Shape

Trim Narrow Non-tilt, Round

Dimensions

Ø82 x 89 H mm

Adjustment

Rotation 350°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20

IP54 additional optic and glass required

Warranty

5 Years

Photometrics

Flux Range

386 to 827 lm

*Based on all tested combinations

Distributions

Beam Lens Variations

8° / 15° / 24° / 36° / 60°

Optical Accessories optional

Honeycomb

Spread Lens

Diffuser

Clear

Reflector

Black

Electrical

Control Gear

Remote

Power Consumption

13W

Luminous Efficacy

Up to 63.2 lm/W @ 827 lm, 13W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output

DALI-2

1 - 10V

TRIAC

Bluetooth available upon request

Zigbee available upon request

Casambi available upon request

Light Source

LED COB

Colour Rendering Index

90+

Correlated Colour Temperature

White





2700K / 3000K / 3500K / 4000K / 5000K

Tunable White

2700 - 6000K

SDCM

3

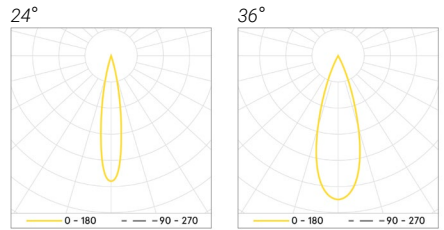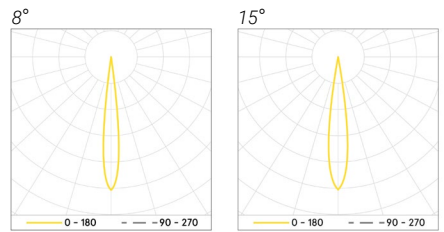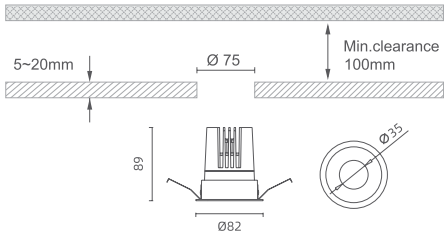

Reflector Colour Options



Black

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

Example

ALTEVO75-TRIM NARROW NONTILT-ROUND-WHITE-IP20-11W-DALI-2-662LM-24D-HONEYCOMB-CHROME-935

ALTEVO 75

Physical

Style & Shape
Trim Non-tilt, Square

Dimensions
85 W x 85 L x 92 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
515 to 1071 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
13W

Luminous Efficacy
Up to 81 Lm/W @ 1071 lm, 13.2W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

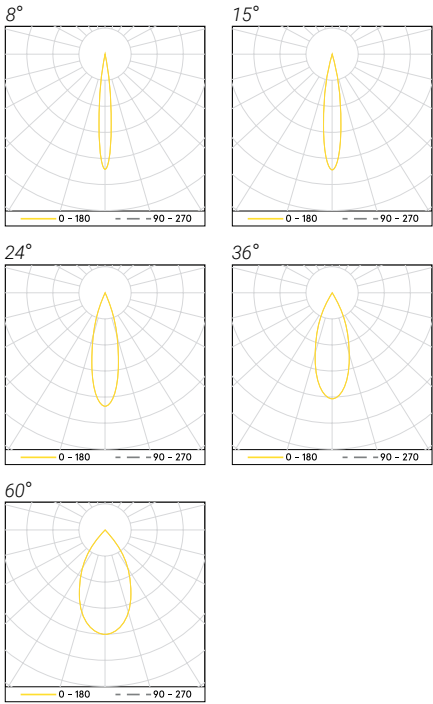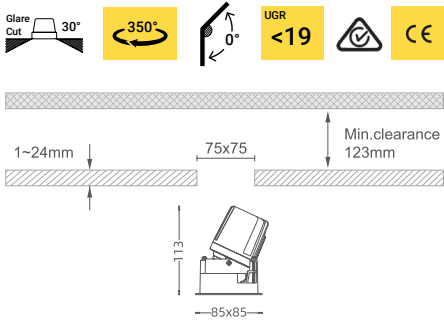

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO75-TRIM NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-883LM-24D-HONEYCOMB-CHROME-935

ALTEVO 75

Physical

Style & Shape
Trimless Non-tilt, Square

Dimensions
74 W x 135 L x 92 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
515 to 1071 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
13W

Luminous Efficacy
Up to 81 Lm/W @ 1071 lm, 13.2W

Luminous Maintenance
54,000hrs (L80 B10)




Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

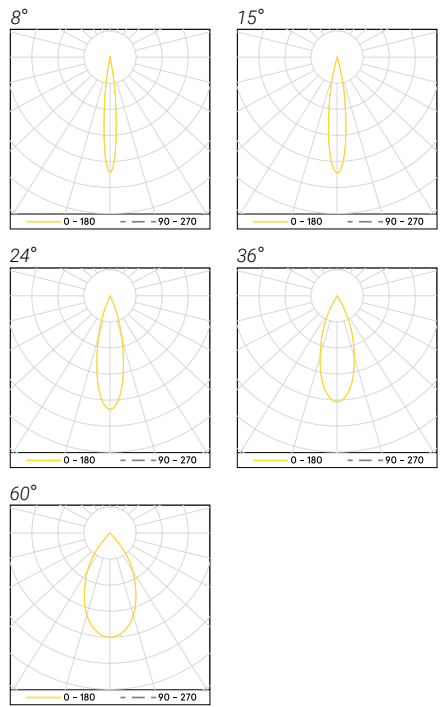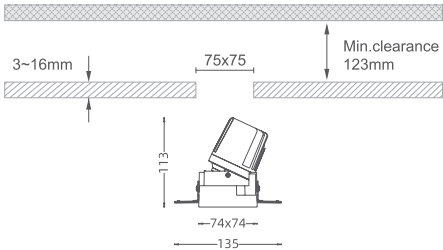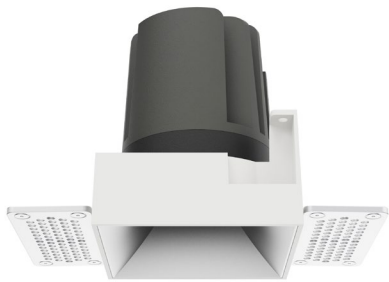

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO75-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-883LM-24D-HONEYCOMB-CHROME-935

ALTEVO 85

LED Downlight - Catalogue



Ø93 x 121 H mm
Trim Tilted
Round, 14W



Ø93 x 102 H mm
Trim Non-titled
Round, 14W



Ø143 x 121 H mm
Trimless Tilted
Round, 14W



Ø143 x 102 H mm
Trimless Non-titled
Round, 14W



95 W x 95 L x 121 H mm
Trim Tilted
Square, 14W



95 W x 95 L x 102 H mm
Trim Non-titled
Square, 14W



83 W x 144 L x 121 H mm
Trimless Tilted
Square, 14W



83 W x 144 L x 102 H mm
Trimless Non-titled
Square, 14W

ALTEVO 85

Physical

Style & Shape
Trim Tilt, Round

Dimensions
Ø93 x 121 H mm

Adjustment
Rotation 350°
Tilt 30°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
529 to 1070 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 45° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
14W

Luminous Efficacy
Up to 81.4 Lm/W @ 1070 lm, 13.1W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

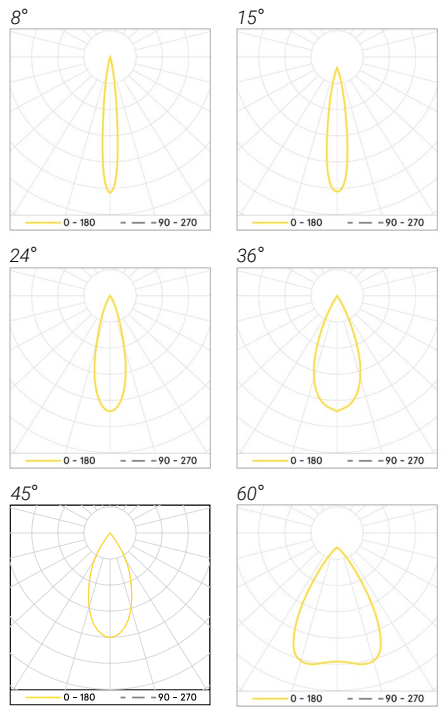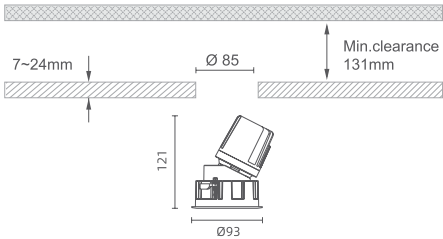

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO85-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-1123LM-24D-HONEYCOMB-CHROME-935

ALTEVO 85

Physical

Style & Shape
Trim Non-tilt, Round

Dimensions
Ø93 x 102 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
565 to 1088 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 45° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
14W

Luminous Efficacy
Up to 84 Lm/W @ 1088 lm, 13W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

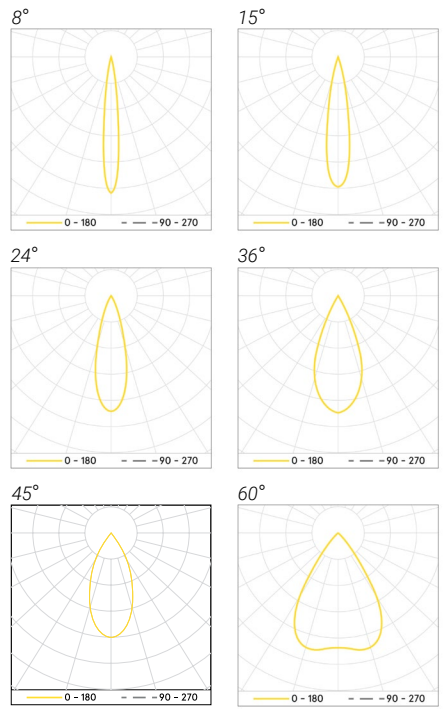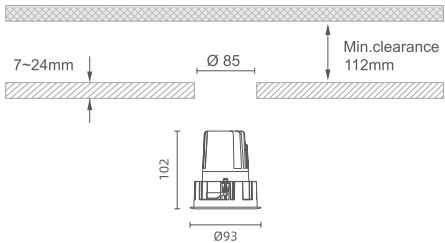

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO85-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-1123LM-24D-HONEYCOMB-CHROME-935

ALTEVO 85

Physical

Style & Shape

Trimless Tilt, Round

Dimensions

Ø143 x 121 H mm

Adjustment

Rotation 350°
Tilt 30°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20
IP54 additional optic and glass required

Warranty

5 Years

Photometrics

Flux Range

529 to 1070 lm
*Based on all tested combinations

Distributions

Beam Lens Variations
8° / 15° / 24° / 36° / 45° / 60°
Optical Accessories optional
Honeycomb
Spread Lens
Diffuser
Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

14W

Luminous Efficacy

Up to 81.4 Lm/W @ 1070 lm, 13.1W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth available upon request
Zigbee available upon request
Casambi available upon request

Light Source

LED COB

Colour Rendering Index



90+

Correlated Colour Temperature

White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM

3

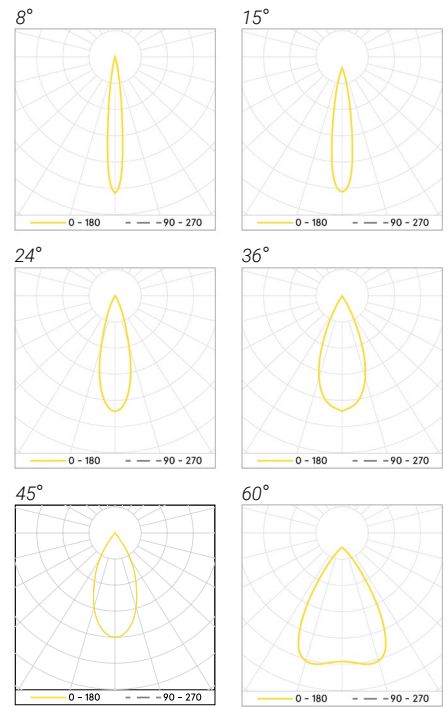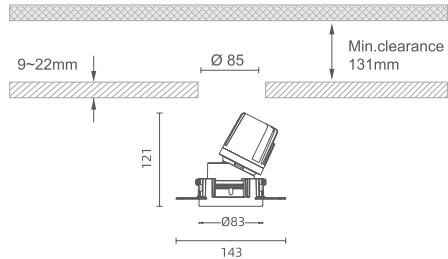

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVO85-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-1123LM-24D-HONEYCOMB-CHROME-935

ALTEVO 85

Physical

Style & Shape
Trimless Non-tilt, Round

Dimensions
Ø143 x 102 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
565 to 1088 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 45° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
14W

Luminous Efficacy
Up to 84 Lm/W @ 1088 lm, 13W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

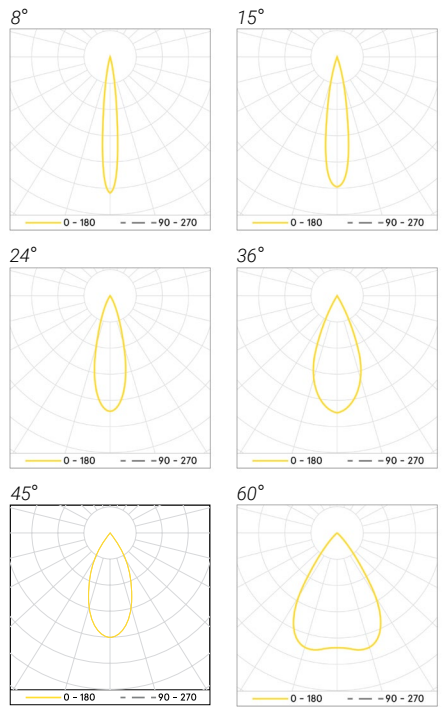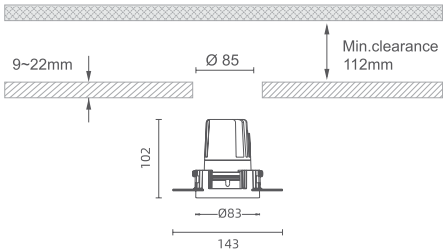

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO85-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-1123LM-24D-HONEYCOMB-CHROME-935

ALTEVO 85

Physical

Style & Shape
Trim Tilt, Square

Dimensions
95 W x 95 L x 121 H mm

Adjustment
Rotation 350°
Tilt 30°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
519 to 1015 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 45° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
14W

Luminous Efficacy
Up to 78.6 Lm/W @ 1015 lm, 12.9W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K


SDCM
3

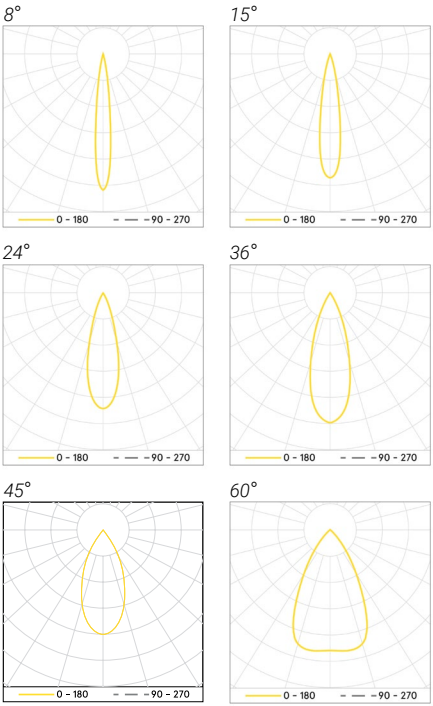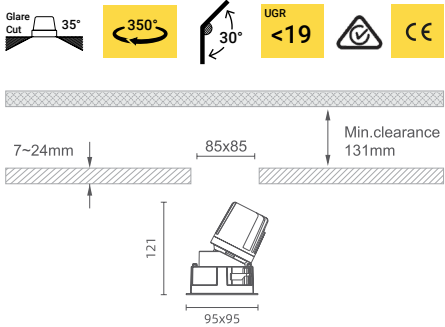

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO85-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-1123LM-24D-HONEYCOMB-CHROME-935

ALTEVO 85

Physical

Style & Shape
Trim Non-tilt, Square

Dimensions
95 W x 95 L x 102 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
565 to 1079 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 45° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
14W

Luminous Efficacy
Up to 83.6 Lm/W @ 1079 lm, 12.9W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

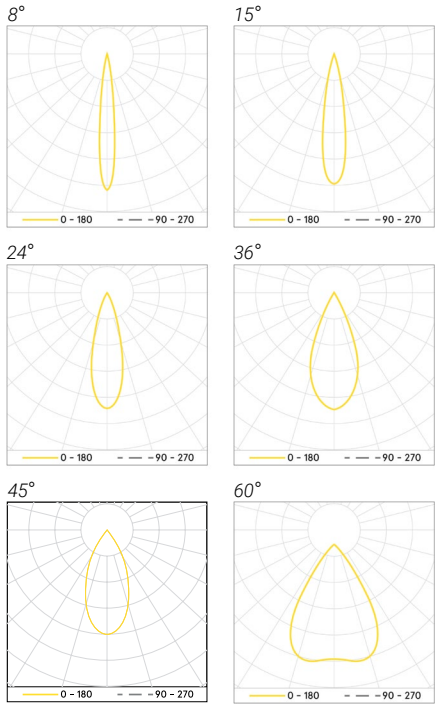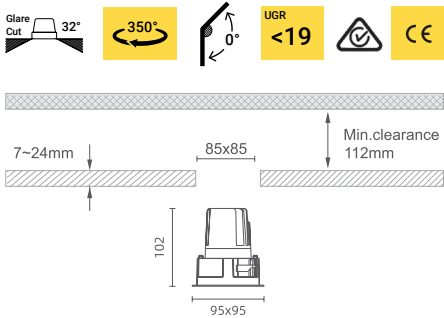

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO85-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-1123LM-24D-HONEYCOMB-CHROME-935

ALTEVO 85

Physical

Style & Shape
Trimless Tilt, Square

Dimensions
83 W x 144 L x 121 H mm

Adjustment
Rotation 350°
Tilt 30°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
519 to 1015 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 45° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
14W

Luminous Efficacy
Up to 78.6 Lm/W @ 1015 lm, 12.9W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

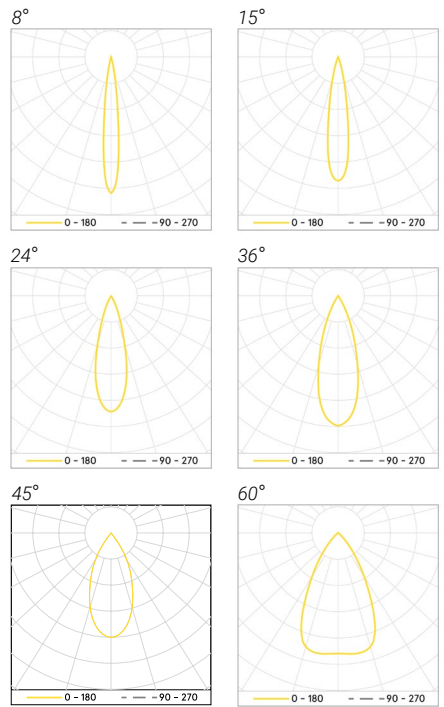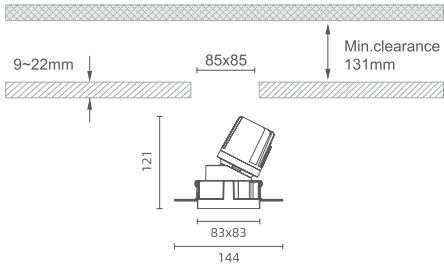

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO85-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-1123LM-24D-HONEYCOMB-CHROME-935

ALTEVO 85

Physical

Style & Shape
Trimless Non-tilt, Square

Dimensions
83 W x 144 L x 102 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
565 to 1079 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
8° / 15° / 24° / 36° / 45° / 60°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
14W

Luminous Efficacy
Up to 83.6 Lm/W @ 1079 lm, 12.9W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K


SDCM
3

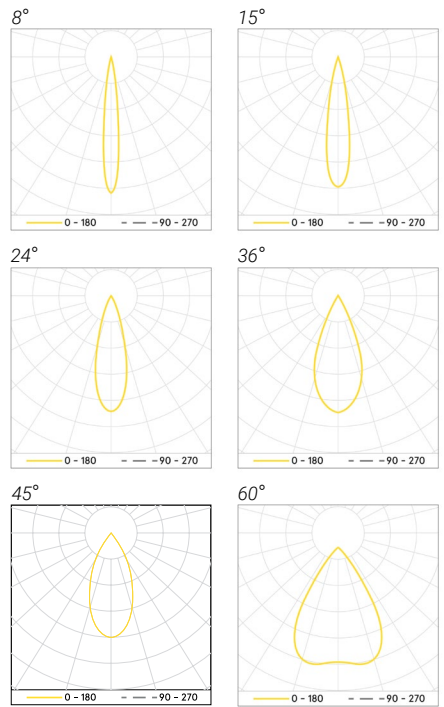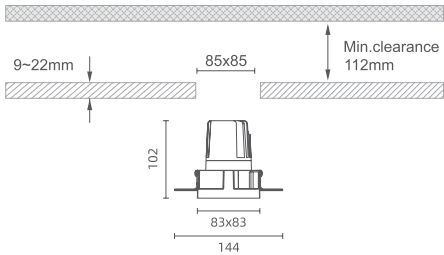

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO85-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-1123LM-24D-HONEYCOMB-CHROME-935

ALTEVO 105

LED Downlight - Catalogue



Ø115 x 147 H mm
Trim Tilted
Round, 25W



Ø115 x 127 H mm
Trim Non-tilted
Round, 25W



Ø164 x 147 H mm
Trimless Tilted
Round, 25W



Ø164 x 127 H mm
Trimless Non-tilted
Round, 25W



115 W x 115 L x 147 H mm
Trim Tilted
Square, 25W



115 W x 115 L x 127 H mm
Trim Non-tilted
Square, 25W



103 W x 164 L x 147 H mm
Trimless Tilted
Square, 25W



103 W x 164 L x 127 H mm
Trimless Non-tilted
Square, 25W

ALTEVO 105

Physical

Style & Shape

Trim Tilt, Round

Dimensions

Ø115 x 147 H mm

Adjustment

Rotation 350°
Tilt 30°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20
IP54 *additional optic and glass required*

Warranty

5 Years

Photometrics

Flux Range

1178 to 2317 lm

**Based on all tested combinations*

Distributions

Beam Lens Variations

15° / 24° / 40° / 55°

Optical Accessories *optional*

Honeycomb

Spread Lens

Diffuser

Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

25W

Luminous Efficacy

Up to 95 Lm/W @ 2317 lm, 24.4W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output

DALI-2

1 - 10V

TRIAC

Bluetooth *available upon request*

Zigbee *available upon request*

Casambi *available upon request*

Light Source

LED COB

Correlated Colour Temperature

White

2700K / 3000K / 3500K / 4000K / 5000K

Tunable White






2700 - 6000K

Colour Rendering Index

90+

SDCM

3

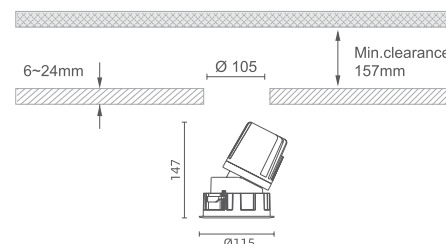

Reflector Colour Options



White



Black



Silver



Black Chrome

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVO105-TRIM TILT-ROUND-WHITE-IP20-11W-DALI-2-2062LM-24D-HONEYCOMB-CHROME-935

ALTEVO 105

Physical

Style & Shape
Trim Non-tilt, Round

Dimensions
Ø115 x 127 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
1270 to 2362 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 40° / 55°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
25W

Luminous Efficacy
Up to 96.4 lm/W @ 2362 lm, 24.5W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

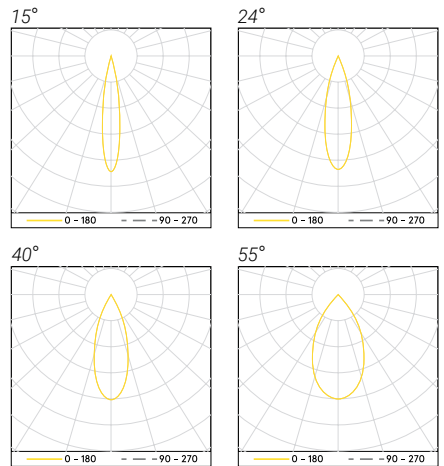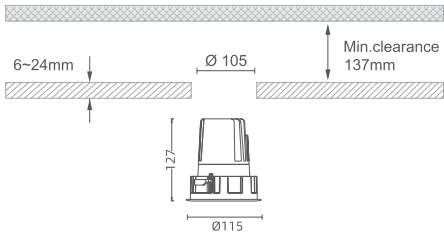

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO105-TRIM NONTILT-ROUND-WHITE-IP20-11W-DALI-2-2062LM-24D-HONEYCOMB-CHROME-935

ALTEVO 105

Physical

Style & Shape

Trimless Tilt, Round

Dimensions

Ø164 x 147 H mm

Adjustment

Rotation 350°
Tilt 30°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20
IP54 *additional optic and glass required*

Warranty

5 Years

Photometrics

Flux Range

1178 to 2317 lm

**Based on all tested combinations*

Distributions

Beam Lens Variations

15° / 24° / 40° / 55°

Optical Accessories *optional*

Honeycomb

Spread Lens

Diffuser

Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

25W

Luminous Efficacy

Up to 95 Lm/W @ 2317 lm, 24.4W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output

DALI-2

1 - 10V

TRIAC

Bluetooth *available upon request*

Zigbee *available upon request*

Casambi *available upon request*

Light Source

LED COB

Correlated Colour Temperature

White

2700K / 3000K / 3500K / 4000K / 5000K

Tunable White






2700 - 6000K

Colour Rendering Index

90+

SDCM

3

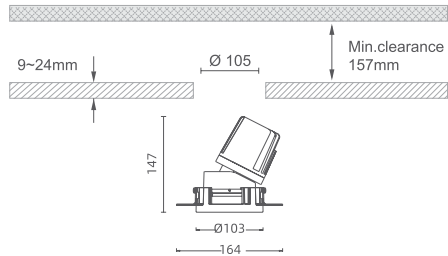

Reflector Colour Options



White



Black



Silver



Black Chrome

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVO105-TRIMLESS TILT-ROUND-WHITE-IP20-11W-DALI-2-2062LM-24D-HONEYCOMB-CHROME-935

ALTEVO 105

Physical

Style & Shape

Trimless Non-tilt, Round

Dimensions

Ø164 x 127 H mm

Adjustment

Rotation 350°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20

IP54 additional optic and glass required

Warranty

5 Years

Photometrics

Flux Range

1270 to 2362 lm

*Based on all tested combinations

Distributions

Beam Lens Variations

15° / 24° / 40° / 55°

Optical Accessories optional

Honeycomb

Spread Lens

Diffuser

Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

25W

Luminous Efficacy

Up to 96.4 Lm/W @ 2362 lm, 24.5W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output

DALI-2

1 - 10V

TRIAC

Bluetooth available upon request

Zigbee available upon request

Casambi available upon request

Light Source

LED COB

Correlated Colour Temperature

White

2700K / 3000K / 3500K / 4000K / 5000K

Tunable White






2700 - 6000K

Colour Rendering Index

90+

SDCM

3

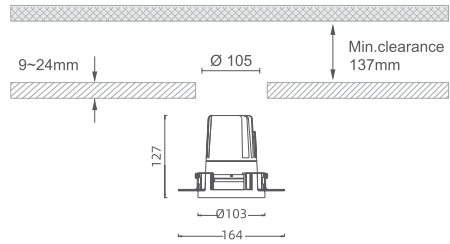

Reflector Colour Options



White



Black



Silver



Black Chrome

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

System Power	System Output	Beam	CCT	CRI
25W	2201lm	15°	4000K	>90
	2362lm	24°		
	2051lm	40°		
	2308lm	55°		

Specification Code

Code Guide

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

Example

ALTEVO105-TRIMLESS NONTILT-ROUND-WHITE-IP20-11W-DALI-2-2062LM-24D-HONEYCOMB-CHROME-935

ALTEVO 105

Physical

Style & Shape

Trim Tilt, Square

Dimensions

115 W x 115 L x 147 H mm

Adjustment

Rotation 350°

Tilt 30°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20

IP54 *additional optic and glass required*

Warranty

5 Years

Photometrics

Flux Range

1813 to 2187 lm

**Based on all tested combinations*

Distributions

Beam Lens Variations

15° / 24° / 40° / 55°

Optical Accessories *optional*

Honeycomb

Spread Lens

Diffuser

Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

25W

Luminous Efficacy

Up to 89.7 Lm/W @ 2187 lm, 24.4W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output

DALI-2

1 - 10V

TRIAC

Bluetooth *available upon request*

Zigbee *available upon request*

Casambi *available upon request*

Light Source

LED COB

Correlated Colour Temperature

White

2700K / 3000K / 3500K / 4000K / 5000K

Tunable White






2700 - 6000K

Colour Rendering Index

90+

SDCM

3

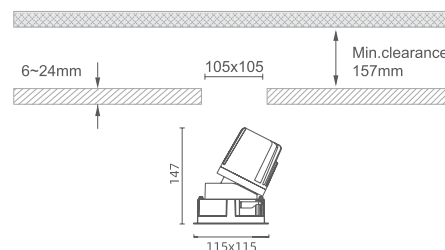

Reflector Colour Options



White



Black



Silver



Black Chrome

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVO105-TRIM TILT-SQUARE-WHITE-IP20-11W-DALI-2-2062LM-24D-HONEYCOMB-CHROME-935

ALTEVO 105

Physical

Style & Shape
Trim Non-tilt, Square

Dimensions
115 W x 115 L x 127 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
1971 to 2254 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 40° / 55°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
25W

Luminous Efficacy
Up to 93 Lm/W @ 2254 lm, 24.3W

Luminous Maintenance
54,000hrs (L80 B10)

Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K




Colour Rendering Index
90+

SDCM
3

System Power	System Output	Beam	CCT	CRI
25W	1971lm	15°	4000K	>90
	2254lm	24°		
	2051lm	40°		
	2224lm	55°		

Specification Code


Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO105-TRIM NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-2062LM-24D-HONEYCOMB-CHROME-935

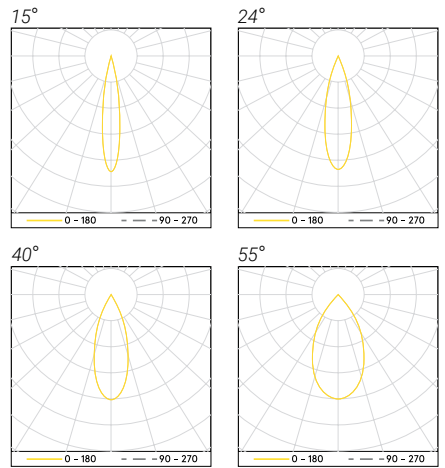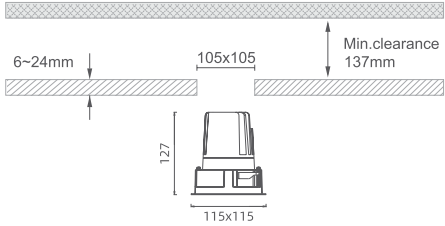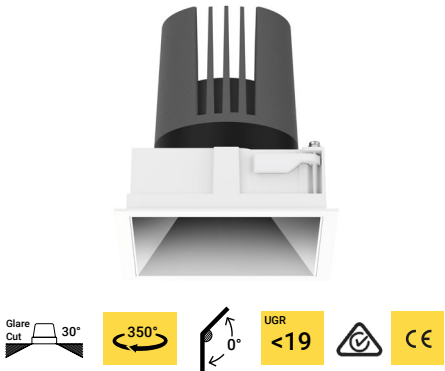

Reflector Colour Options



Optical Accessories



ALTEVO 105

Physical

Style & Shape
Trimless Tilt, Square

Dimensions
103 W x 164 L x 147 H mm

Adjustment
Rotation 350°
Tilt 30°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
1813 to 2187 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 40° / 55°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
25W

Luminous Efficacy
Up to 89.7 Lm/W @ 2187 lm, 24.4W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

Colour Rendering Index
90+


SDCM
3

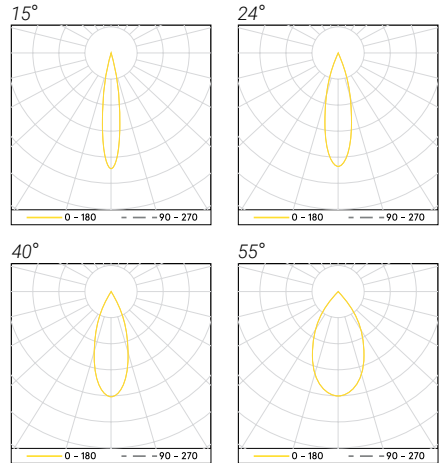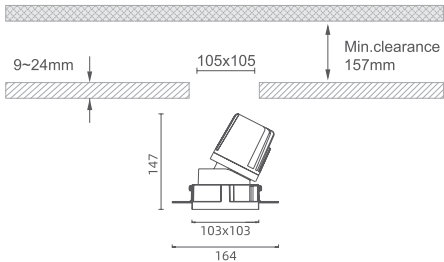

Reflector Colour Options



Optical Accessories



System Power	System Output	Beam	CCT	CRI
25W	1813lm	15°	4000K	>90
	2178lm	24°		
	2051lm	40°		
	2187lm	55°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO105-TRIMLESS TILT-SQUARE-WHITE-IP20-11W-DALI-2-2062LM-24D-HONEYCOMB-CHROME-935

ALTEVO 105

Physical

Style & Shape
Trimless Non-tilt, Square

Dimensions
103 W x 164 L x 127 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
1971 to 2254 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 40° / 55°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
25W

Luminous Efficacy
Up to 93 Lm/W @ 2254 lm, 24.3W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

Colour Rendering Index
90+

SDCM
3

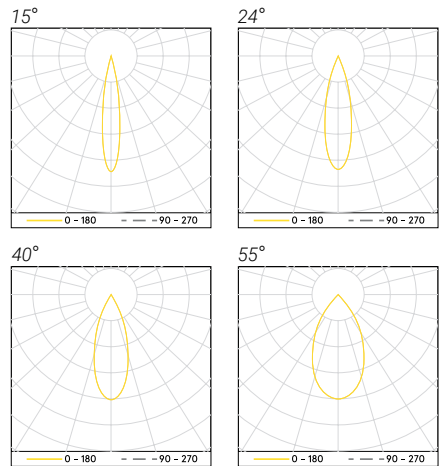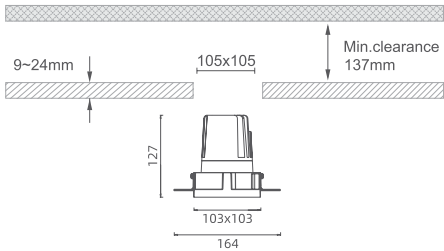

Reflector Colour Options



Optical Accessories



System Power	System Output	Beam	CCT	CRI
25W	1971lm	15°	4000K	>90
	2254lm	24°		
	2051lm	40°		
	2224lm	55°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO105-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-2062LM-24D-HONEYCOMB-CHROME-935

ALTEVO 125

LED Downlight - Catalogue



Ø135 x 170 H mm
Trim Tilted
Round, 41W



Ø135 x 58 H mm
Trim Non-tilted
Round, 41W



Ø187 x 170 H mm
Trimless Tilted
Round, 41W



Ø187 x 158 H mm
Trimless Non-tilted
Round, 41W



135 W x 135 L x 170 H mm
Trim Tilted
Square, 41W



135 W x 135 L x 158 H mm
Trim Non-tilted
Square, 41W



122 W x 193 L x 170 H mm
Trimless Tilted
Square, 41W



122 W x 193 L x 158 H mm
Trimless Non-tilted
Square, 41W

ALTEVO 125

Physical

Style & Shape
Trim Tilt, Round

Dimensions
Ø135 x 170 H mm

Adjustment
Rotation 350°
Tilt 30°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
1892 to 3892 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 45° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

System Power	System Output	Beam	CCT	CRI
41W	3378lm	15°	4000K	>90
	3845lm	24°		
	3892lm	36°		
	3403lm	45°		
	3416lm	50°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO125-TRIM TILT-ROUND-WHITE-IP20-11W-DALI-2-3403LM-24D-HONEYCOMB-CHROME-935

Electrical

Control Gear
Remote

Power Consumption
41W

Luminous Efficacy
Up to 91.8 lm/W @ 3892 lm, 42.4W

Luminous Maintenance
54,000hrs (L80 B10)







Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

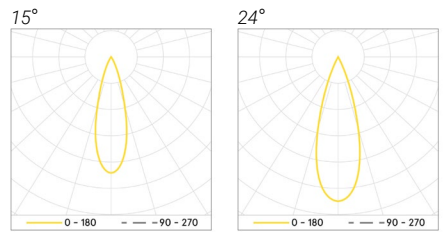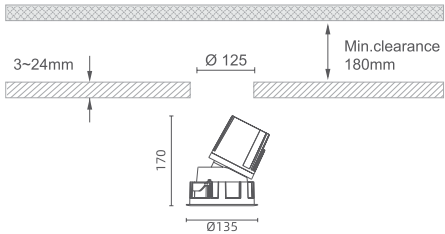

Reflector Colour Options



Optical Accessories



ALTEVO 125

Physical

Style & Shape
Trim Non-tilt, Round

Dimensions
Ø135 x 158 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
2049 to 3999 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 45° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
41W

Luminous Efficacy
Up to 94 lm/W @ 3999 lm, 42.5W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

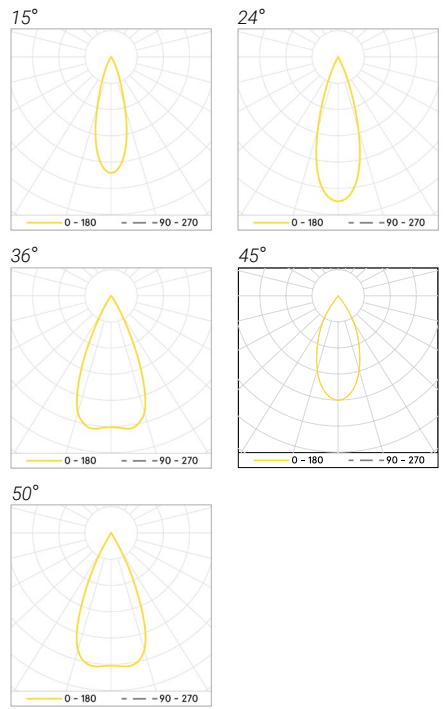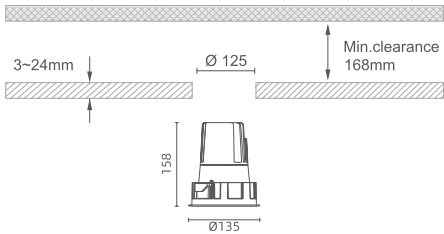

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO125-TRIM NONTILT-ROUND-WHITE-IP20-11W-DALI-2-3403LM-24D-HONEYCOMB-CHROME-935

ALTEVO 125

Physical

Style & Shape

Trimless Tilt, Round

Dimensions

Ø187 x 170 H mm

Adjustment

Rotation 350°

Tilt 30°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20

IP54 additional optic and glass required

Warranty

5 Years

Photometrics

Flux Range

1892 to 3892 lm

*Based on all tested combinations

Distributions

Beam Lens Variations

15° / 24° / 36° / 45° / 50°

Optical Accessories optional

Honeycomb

Spread Lens

Diffuser

Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

41W

Luminous Efficacy

Up to 91.8 lm/W @ 3892 lm, 42.4W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output

DALI-2

1 - 10V

TRIAC

Bluetooth available upon request

Zigbee available upon request

Casambi available upon request

Light Source

LED COB

Colour Rendering Index

90+

Correlated Colour Temperature

White







2700K / 3000K / 3500K / 4000K / 5000K

Tunable White

2700 - 6000K

SDCM

3

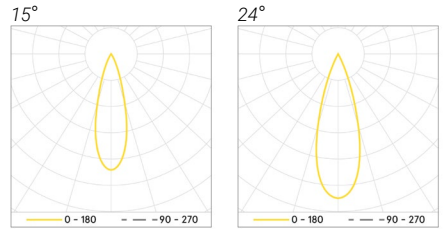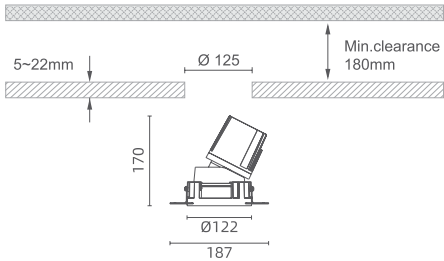

Reflector Colour Options



White



Black



Silver



Black Chrome

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVO125-TRIMLESS TILT-ROUND-WHITE-IP20-11W-DALI-2-3403LM-24D-HONEYCOMB-CHROME-935

ALTEVO 125

Physical

Style & Shape
Trimless Non-tilt, Round

Dimensions
Ø187 x 158 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
2049 to 3999 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 45° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
41W

Luminous Efficacy
Up to 94 lm/W @ 3999 lm, 42.5W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K


SDCM
3

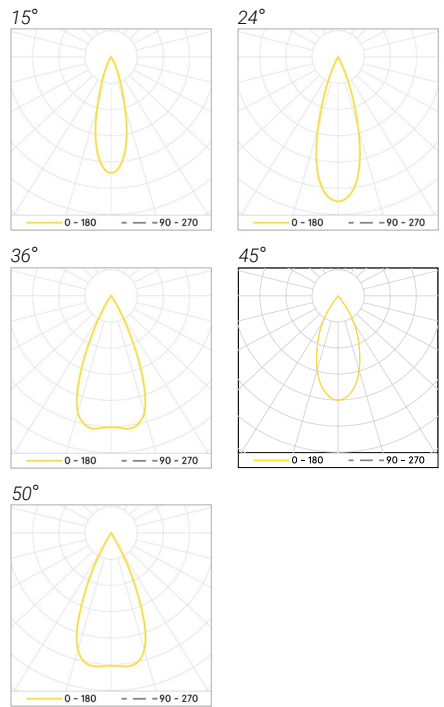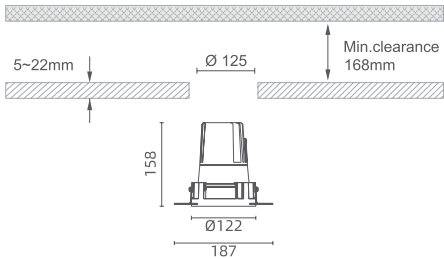

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO125-TRIMLESS NONTILT-ROUND-WHITE-IP20-11W-DALI-2-3403LM-24D-HONEYCOMB-CHROME-935

ALTEVO 125

Physical

Style & Shape
Trim Tilt, Square

Dimensions
135 W x 135 L x 170 H mm

Adjustment
Rotation 350°
Tilt 30°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
3023 to 3774 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 45° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

System Power	System Output	Beam	CCT	CRI
41W	3023lm	15°	4000K	>90
	3354lm	24°		
	3774lm	36°		
	3403lm	45°		
	3273lm	50°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO125-TRIM TILT-SQUARE-WHITE-IP20-11W-DALI-2-3403LM-24D-HONEYCOMB-CHROME-935

Electrical

Control Gear
Remote

Power Consumption
41W

Luminous Efficacy
Up to 89.4 lm/W @ 3774 lm, 42.2W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

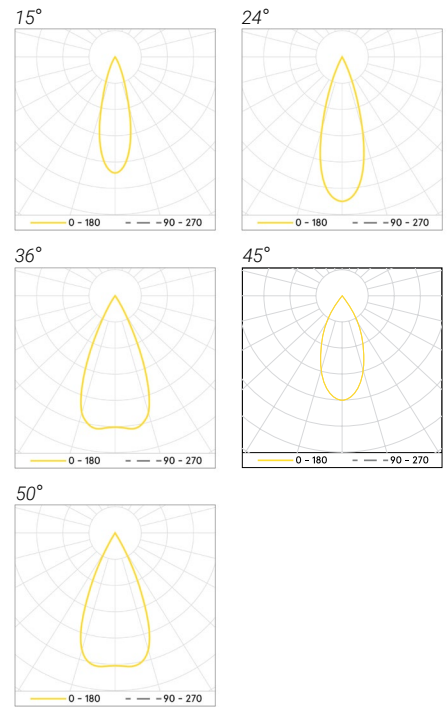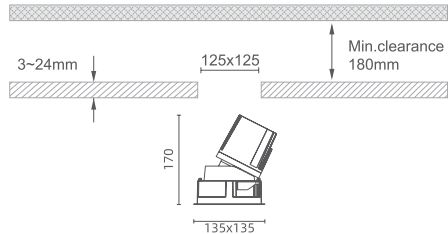

Reflector Colour Options



Optical Accessories



ALTEVO 125

Physical

Style & Shape
Trim Non-tilt, Square

Dimensions
135 W x 135 L x 158 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
3293 to 3841 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 45° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
41W

Luminous Efficacy
Up to 89.8 lm/W @ 3841 lm, 42.7W

Luminous Maintenance
54,000hrs (L80 B10)




Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

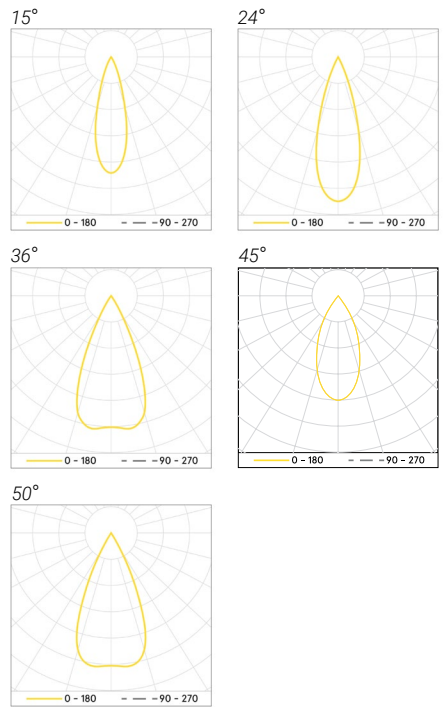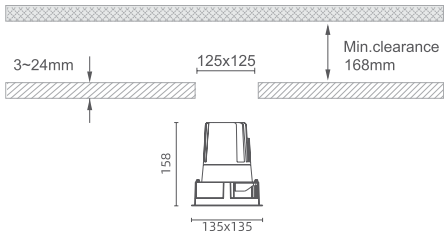

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO125-TRIM NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-3403LM-24D-HONEYCOMB-CHROME-935

ALTEVO 125

Physical

Style & Shape
Trimless Tilt, Square

Dimensions
122 W x 193 L x 170 H mm

Adjustment
Rotation 350°
Tilt 30°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
3023 to 3774 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 45° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

System Power	System Output	Beam	CCT	CRI
41W	3023lm	15°	4000K	>90
	3354lm	24°		
	3774lm	36°		
	3403lm	45°		
	3273lm	50°		

Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO125-TRIMLESS TILT-SQUARE-WHITE-IP20-11W-DALI-2-3403LM-24D-HONEYCOMB-CHROME-935

Electrical

Control Gear
Remote

Power Consumption
41W

Luminous Efficacy
Up to 89.4 lm/W @ 3774 lm, 42.2W

Luminous Maintenance
54,000hrs (L80 B10)




Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

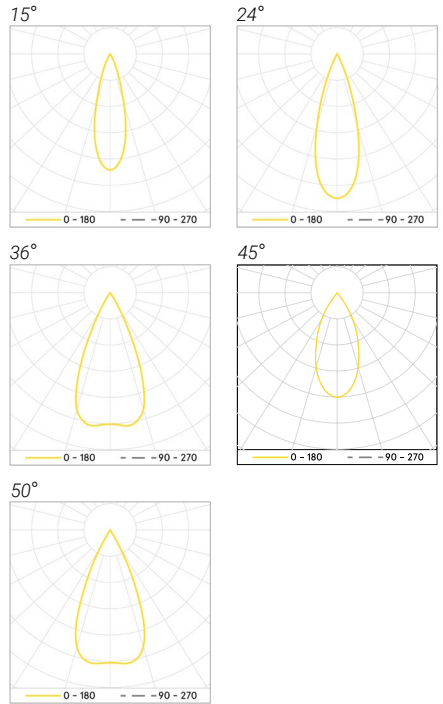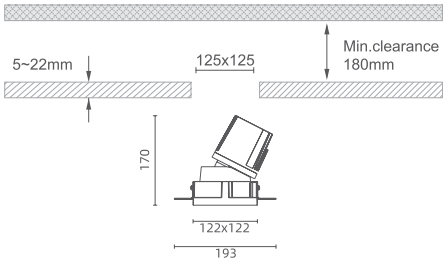

Reflector Colour Options



Optical Accessories



ALTEVO 125

Physical

Style & Shape
Trimless Non-tilt, Square

Dimensions
122 W x 193 L x 158 H mm

Adjustment
Rotation 350°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
3293 to 3841 lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
15° / 24° / 36° / 45° / 50°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
41W

Luminous Efficacy
Up to 89.8 lm/W @ 3841 lm, 42.7W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 6000K

SDCM
3

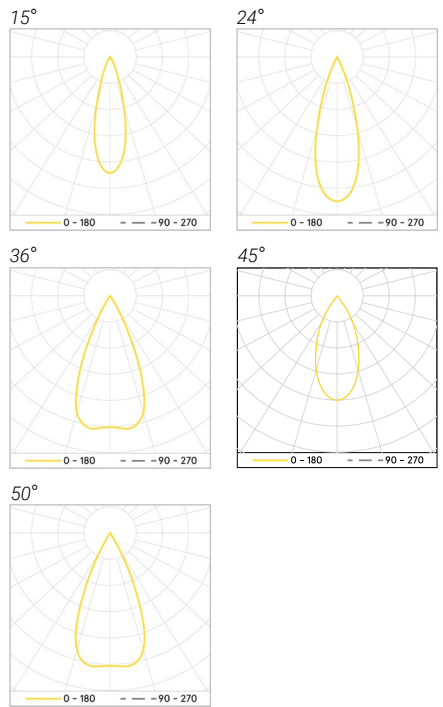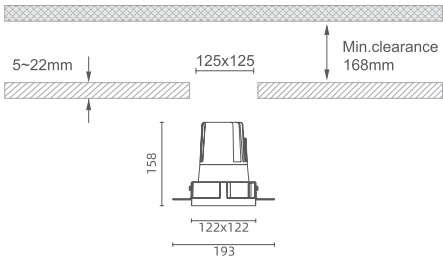

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT
Example ALTEVO125-TRIMLESS NONTILT-SQUARE-WHITE-IP20-11W-DALI-2-3403LM-24D-HONEYCOMB-CHROME-935

ALTEVO Grand

LED Downlight - Catalogue

Ø160 - 180



Ø190 x 215 H mm
Trim Tilted
Round, 60W

Ø180 - 205



Ø215 x 240 H mm
Trim Tilted
Round, 80W

Ø200 - 230



Ø240 x 270 H mm
Trim Tilted
Round, 120W

ALTEVO Grand

Physical

Style & Shape

Trim Tilt, Round

Dimensions

Ø190 x 215 H mm

Adjustment

Rotation 350°
Tilt 25°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20
IP54 *additional optic and glass required*

Warranty

5 Years

Photometrics

Flux Range

4348 to 4365 lm

**Based on all tested combinations*

Distributions

Beam Lens Variations

24° / 36° / 50°

Optical Accessories *optional*

Honeycomb
Spread Lens
Diffuser
Clear

Reflector

System Power	System Output	Beam	CCT	CRI
60W	4365lm	24°	4000K	>90
	4348lm	36°		
	3472lm	50°		

Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVOGRAND190-TRIM TILT-ROUND-WHITE-IP20-11W-DALI-2-3724LM-24D-HONEYCOMB-CHROME-935

Electrical

Control Gear

Remote

Power Consumption

60W

Luminous Efficacy

Up to 78.1 Lm/W @ 4365 lm, 55.9W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output

DALI-2

1 - 10V

TRIAC

Bluetooth *available upon request*

Zigbee *available upon request*

Casambi *available upon request*

Light Source

LED COB

Colour Rendering Index

90+

Correlated Colour Temperature

White





2700K / 3000K / 3500K / 4000K / 5000K

Tunable White

2700 - 5000K

SDCM

3

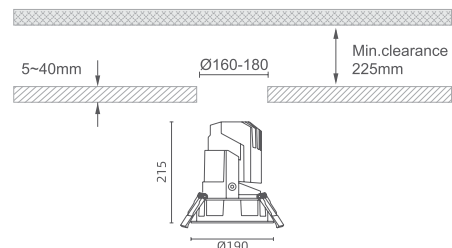

Reflector Colour Options



White



Black



Silver



Chrome

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

ALTEVO Grand

Physical

Style & Shape

Trim Tilt, Round

Dimensions

Ø215 x 240 H mm

Adjustment

Rotation 350°

Tilt 25°

Finish Options

Ring Black, White

Mounting Option

Recessed

Environmental

IP20

IP54 *additional optic and glass required*

Warranty

5 Years

Photometrics

Flux Range

5190 to 5408 lm

**Based on all tested combinations*

Distributions

Beam Lens Variations

24° / 36° / 55°

Optical Accessories *optional*

Honeycomb

Spread Lens

Diffuser

Clear

Reflector

White, Black, Silver, Black Chrome

Electrical

Control Gear

Remote

Power Consumption

80W

Luminous Efficacy

Up to 73.6 Lm/W @ 5408 lm, 73.5W

Luminous Maintenance

54,000hrs (L80 B10)

Dimming Options

Fixed Output

DALI-2

1 - 10V

TRIAC

Bluetooth *available upon request*

Zigbee *available upon request*

Casambi *available upon request*

Light Source

LED COB

Colour Rendering Index

90+

Correlated Colour Temperature

White





2700K / 3000K / 3500K / 4000K / 5000K

Tunable White

2700 - 5000K

SDCM

3

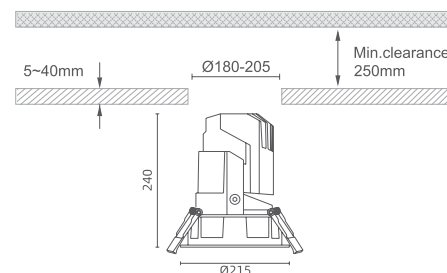

Reflector Colour Options



White



Black



Silver



Chrome

Optical Accessories



Honeycomb Louver



Spread Lens



Diffusion Lens



Clear Lens

Specification Code

Code Guide

Example

RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCT

ALTEVOGRAND215-TRIM TILT-ROUND-WHITE-IP20-11W-DALI-2-6856LM-24D-HONEYCOMB-CHROME-935

ALTEVO Grand

Physical

Style & Shape
Trim Tilt, Round

Dimensions
Ø240 x 270 H mm

Adjustment
Rotation 350°
Tilt 25°

Finish Options
Ring Black, White

Mounting Option
Recessed

Environmental
IP20
IP54 *additional optic and glass required*

Warranty
5 Years

Photometrics

Flux Range
10748 to 10825lm
**Based on all tested combinations*

Distributions
Beam Lens Variations
24° / 38° / 55°
Optical Accessories *optional*
Honeycomb
Spread Lens
Diffuser
Clear

Reflector
White, Black, Silver, Black Chrome

Electrical

Control Gear
Remote

Power Consumption
120W

Luminous Efficacy
Up to 97.1 Lm/W @ 10825 lm, 110.8W

Luminous Maintenance
54,000hrs (L80 B10)



Dimming Options
Fixed Output
DALI-2
1 - 10V
TRIAC
Bluetooth *available upon request*
Zigbee *available upon request*
Casambi *available upon request*

Light Source
LED COB

Colour Rendering Index
90+

Correlated Colour Temperature
White
2700K / 3000K / 3500K / 4000K / 5000K
Tunable White
2700 - 5000K

SDCM
3

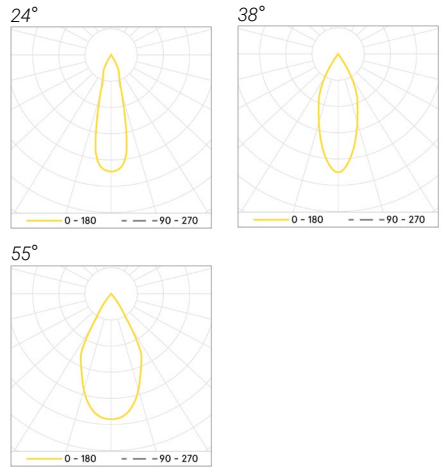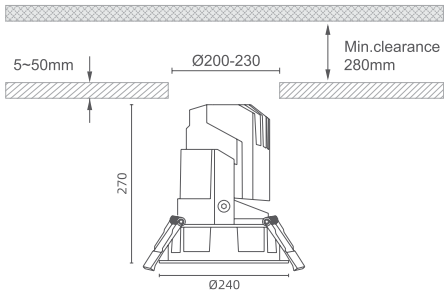

Reflector Colour Options



Optical Accessories



Specification Code

Code Guide RANGE-STYLE-SHAPE-FINISH-IP-POWER-DIM-OUTPUT-BEAM-OPTICAL-REFL.COLOUR-CRI-CCCT
Example ALTEVOGRAND240-TRIM TILT-ROUND-WHITE-IP20-11W-DALI-2-9031LM-24D-HONEYCOMB-CHROME-935

INTEGRATE LIGHT WITH LIFE, BEAUTIFULLY
