




EVELO-S

Light, personalised and positioned beautifully



Comfortable Low-Glare Illumination Delivered with Evelo-S

Using reflector technology, we now offer two light distributions at 20° and 48° beam angles on a curved profile. Providing a gentle and low-glare illumination with radius-based shapes.

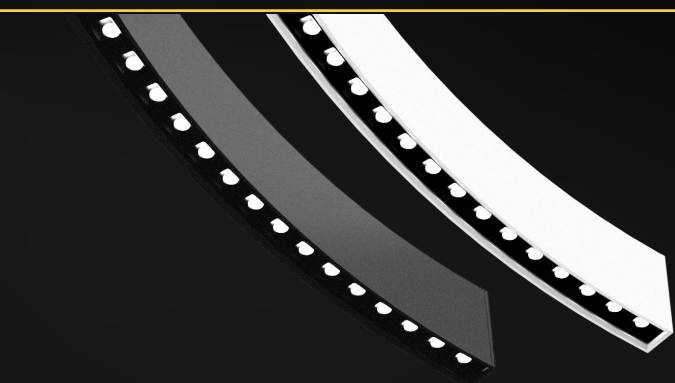


Adding Curves, Anywhere

At just 34mm in width, the Evelo-S presents the flexibility to serve as both a striking statement piece or a functional task light that enhances your space while rendering comfortable, low-glare lighting.

Choose your Ideal Radius

Explore new light configuration possibilities by combining straight sections with our six curved reflector modules which range from 200mm to 900mm in radius*.

*The radii are fixed per diagram and measured to the outer side of the reflector modules.

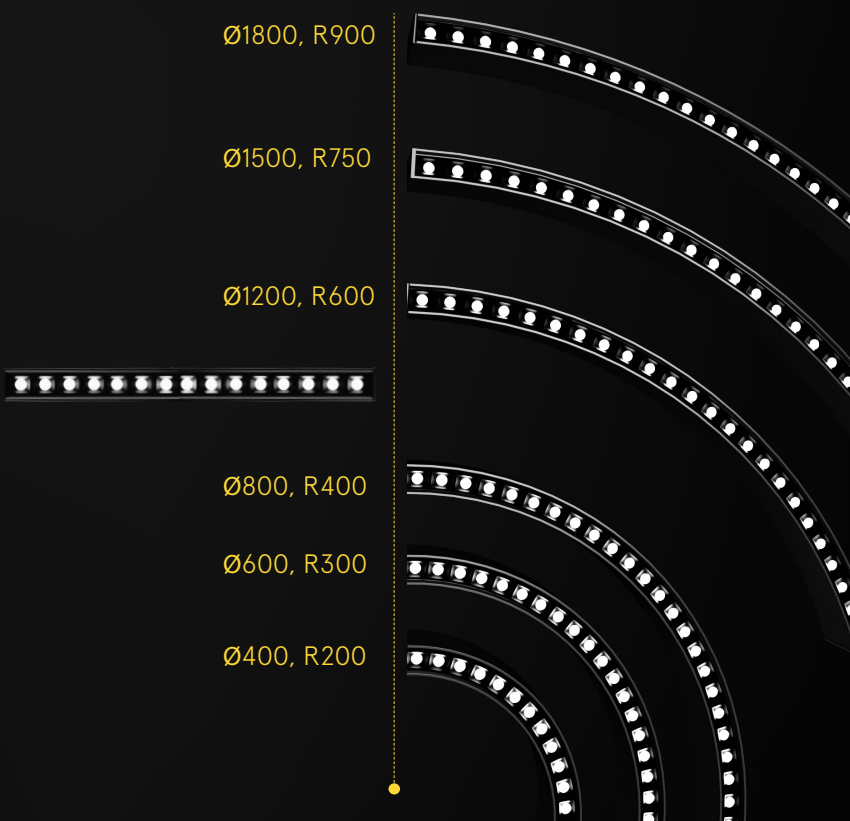

Colour for Any Occasion

Various finish options available, a broad spectrum of colours* that blend and compliment the project design.

**Reflector shades are available in black or white only.*
**Please refer to our custom finish datasheet for complete finish selection or contact our Sales Representative.*

Standard Powder Coatings




Natural Look Finishes



Colour Powder Coatings



Spec your shape with Evelo-S.

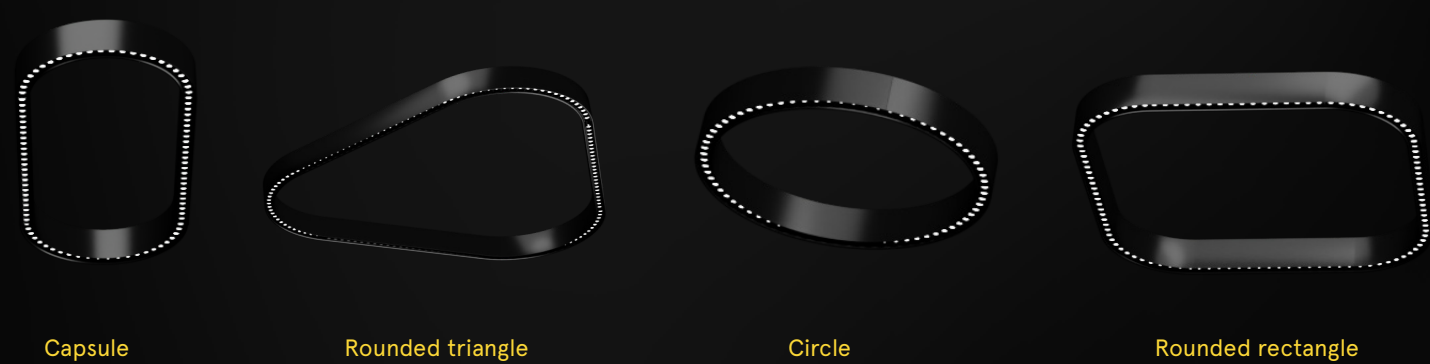

	Evelo-S Direct Illumination	Evelo-S Indirect Illumination
Line Drawing		
Mounting	Wire Suspended Rod Suspended Surface Mounted	Wire Suspended Rod Suspended
Flux Range *Subject to configuration	310 to 1320 Lm/module @3000K 330 to 1420 Lm/module @4000K	730 Lm/m @3000K 830 Lm/m @4000K
Power Consumption Range *Subject to configuration	3.3 - 23.5 W/module	12.0 W/m (Indirect Only)
Luminous Efficacy *Subject to configuration	Up to 94.5 Lm/W	Up to 69.2 Lm/W

INTEGRATE LIGHT WITH LIFE, BEAUTIFULLY

mlight
illumination engineering

Call +61 3 8786 3311 | mlightgroup.com
MADE IN AUSTRALIA

mLight has a policy of continuous improvements. All product specifications are correct at time of printing and are subject to change without notice. The visual representation of colours and finishes within this document may vary due to printing processes, paper stock and lighting of photography or renders. To view a physical sample of luminaires and accessories, contact your local mLight Product Consultant.